

## Notes

- FINISH: Finish is low VOC thermo-cure powdercoat paint or clear lacquer. Specify three digit color suffix with "PT" finish options.
- HOUSING: Solid spun aluminum cylinder with white acrylic diffuser panels behind perforated design (if selected).
- MOUNTING: Fixture mounts to a standard octagonal junction box.
- ETL listed to UL standards for dry and damp locations
- \*Surge protection recommended for use with D1 (Triac/Leading Edge) dimming systems.

**1 Fixture Number**  
CC-164 12.5"H x 6" Dia.

**2 Finish**  
**Housing & Trim**  
Brushed Solid Aluminum (BA)  
Standard Painted Finishes (PT)

**3 Lamping**  
All LED options include integral 120-277v 1-100% dimming drivers compatible with 0-10v, Triac, and ELV controls. Over-current and short-circuit protected. All LEDs are 80+ CRI, 50,000 hr. L70. Wattage listed includes driver efficiency.

CC-164

LED Options	Lumens	Wattage
C44	4805 (initial)	44

### Non-LED Lamps

1N100: (1) 100 watt incandescent


**4 LED Color Temp**  
27: 2700K  
30: 3000K  
35: 3500K  
40: 4000K

**5 LED Dimming**  
D0: 0-10v  
D1: Triac (Leading Edge)\*  
D2: ELV (Trailing Edge)

**6 Downlight Optics Options**  
B60: 60-deg. beam reflector  
B90: 90-deg. beam reflector  
CON: Concentric Ring Louver (approx. 50-deg. beam)

**7 Voltage Options**  
120: 120 volt  
277: 277 volt (Not available with incandescent lamp options)

**8 Panel Options**

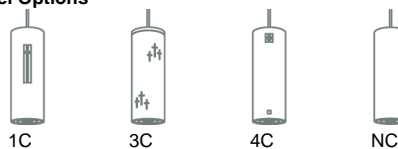

1	2	3	4	5	6	7	8
Fixture #	Housing & Trim (Finish)	Lamping	Color Temp	Dimming	Downlight Opti	Voltage	Panel