


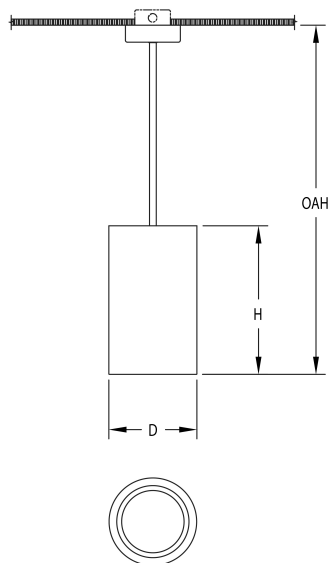

Notes

- ETL listed to UL standards for dry and damp locations
- OAH is standard unless specified.
- FINISH: Finish is low VOC thermo-cure powdercoat paint. Specify three digit color suffix with "PT" finish options.
- HOUSING: Consists of a spun aluminum cylinder housing.
- MOUNTING: Fixture supplied with a painted canopy, 45-degree swivel ball and hanger for mounting to standard octagon junction box.
- Removable bottom reflector.
- *Surge protection recommended for use with D1 (Triac/Leading Edge) dimming systems.

1 Fixture Number
LP-009 15"H x 9" Dia. 53" Oah.

2 Finish
Housing
Standard Painted Finishes (PT)
Brushed Solid Aluminum (BA)

3 Lamping
LED options includes integral 120-277v 1-100% dimming driver compatible with 0-10v, Triac, and ELV controls. Over-current and short-circuit protected. All LEDs are 80+ CRI, 50,000 hr. L70. Wattage listed includes driver efficiency.

LP-009

LED Options	Lumens	Wattage
P55 Downlight Only (55w)	6205 (delivered)	55
P89 Downlight Only (89w)	8074 delivered	89

4 LED Color Temp
27: 2700K
30: 3000K
35: 3500K
40: 4000K

5 LED Dimming
D0: 0-10v
D1: Triac (Leading Edge)*
D2: ELV (Trailing Edge)

6 Downlight Optics Options
B60: 60-deg. beam reflector
B90: 90-deg. beam reflector

7 Voltage Options
120: 120 volt
277: 277 volt (Not available with incandescent lamp options)

1	2	3	4	5	6	7
Fixture #	Housing (Finish)	Lamping	Color Temp	Dimming	Downlight Opti	Voltage