


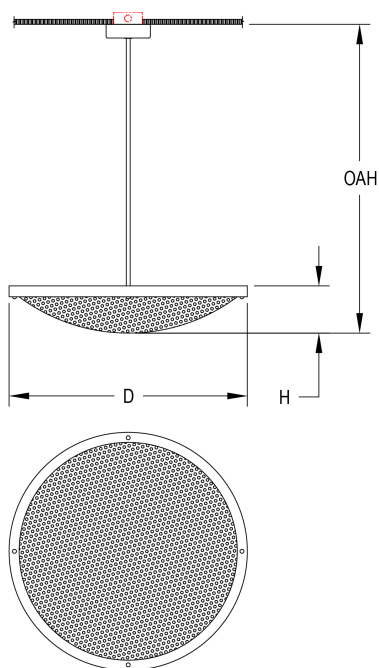

1 Fixture Number

DP-43-30 6"H x 30" Dia. 36" Oah.

DP-43-36 7"H x 36" Dia. 36" Oah.

2 Finish

Trim ring, stem, canopy.

Standard Painted Finishes (PT)

Perforated bowl

Brushed Solid Aluminum (BA)

Standard Painted Finishes (PT)

3 Lamping

All LED options include integral 120-277v 1-100% dimming drivers compatible with 0-10v, Triac, and ELV controls. Over-current and short-circuit protected. All LEDs are 80+ CRI, 50,000 hr. L70. Wattage listed includes driver efficiency.

DP-43-30

LED Options	Lumens	Wattage
B48 Downlight + Uplight (48w)	1402 up/1533 down (delivered)	48

Non-LED Lamps

6N60: (6) 60 watt incandescent

DP-43-36

LED Options	Lumens	Wattage
B96 Downlight + Uplight (96w)	2804 up/3066 down (delivered)	96

Non-LED Lamps

6N75: (6) 75 watt incandescent

4 LED Color Temp

27: 2700K

30: 3000K

35: 3500K

40: 4000K

5 LED Dimming

D0: 0-10v

D1: Triac (Leading Edge)*

D2: ELV (Trailing Edge)

6 Voltage Options

120: 120 volt

277: 277 volt (Not available with incandescent lamp options)

7 Stem Options



Single Stem
(SIN)



Aircraft Cable
(CBL)

1

Fixture #

2

Trim ring, ste
(Finish)

2

Perforated bowl
(Finish)

3

Lamping

4

Color Temp

5

Dimming

6

Voltage

7

Stem