

## Notes

- Specify three digit color suffix with "PT" and "PG" finish options for front and rear (reflective) panels. A lighter housing color and darker rear panel will produce the most intense reflection.
- HOUSING: Fabricated solid aluminum housing and separate background accent panel. Top and bottom white acrylic diffusers.
- MOUNTING: Fixture mounts to a standard octagonal junction box.
- Top and bottom opal white acrylic lenses standard.
- ETL listed to UL standards for dry and damp locations
- \*Surge protection recommended for use with D1 (Triac/Leading Edge) dimming systems.

**1 Fixture Number**  
**LB-061** 12"W x 12"H x 4" Ext.

**2 Finish**  
**Housing (Primary color)** Standard Painted Finishes (PT)  
**Back panel (Secondary color)** Gloss Painted Finish (PG)

**3 Lamping**  
LED option includes integral 120-277v 1-100% dimming drivers compatible with 0-10v, Triac, and ELV controls. Over-current and short-circuit protected. All LEDs are 80+ CRI, 50,000 hr. L70. Wattage listed includes driver efficiency.

**LB-061**

LED Options	Lumens	Wattage
S16	995 (delivered)	16

**Non-LED Lamps**  
2NT40: (2) 40 watt T-10 incandescent


**4 LED Color Temp**  
27: 2700K  
30: 3000K  
35: 3500K  
40: 4000K

**5 LED Dimming**  
D0: 0-10v  
D1: Triac (Leading Edge)\*  
D2: ELV (Trailing Edge)

**6 Voltage Options**  
120: 120 volt  
277: 277 volt (Not available with incandescent lamp options)

**7 Diffuser Options**  
WH: White Acrylic

**8 Panel Options**

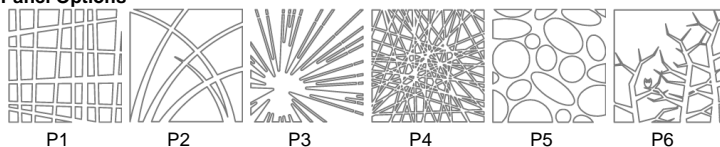

1	2	2	3	4	5	6	7	8
Fixture #	Housing (Primary Finish)	Back panel (Secondary Finish)	Lamping	Color Temp	Dimming	Voltage	Diffuser	Panel