


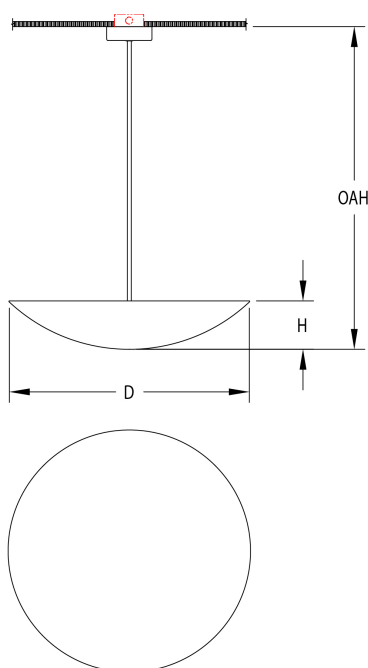

1 Fixture Number

DP-920	5"H x 24" Dia. 31" Oah.
DP-922	6"H x 30" Dia. 44" Oah.
DP-924	7"H x 36" Dia. 45" Oah.
DP-926	8"H x 42" Dia. 58" Oah.
DP-928	9"H x 60" Dia. 71" Oah.

2 Finish

Brushed Solid Aluminum (BA)
Standard Painted Finishes (PT)

3 Lamping

LED options includes integral 120-277v 1-100% dimming driver compatible with 0-10v, Triac, and ELV controls. Over-current and short-circuit protected. All LEDs are 80+ CRI, 50,000 hr. L70. Wattage listed includes driver efficiency.

DP-920

LED Options	Lumens	Wattage
U32 Uplight	2545 (delivered)	32

DP-922

LED Options	Lumens	Wattage
U64 Uplight	5090 (delivered)	64

DP-924

LED Options	Lumens	Wattage
U96 Uplight	7635 (delivered)	96

DP-926

LED Options	Lumens	Wattage
U129 Uplight	10180 (delivered)	128

DP-928

LED Options	Lumens	Wattage
U160 Uplight	12725 delivered	160

4 LED Color Temp

27: 2700K
30: 3000K
35: 3500K
40: 4000K


5 LED Dimming

D0: 0-10v
D1: Triac (Leading Edge)*
D2: ELV (Trailing Edge)

6 Voltage Options

120: 120 volt
277: 277 volt (Not available with incandescent lamp options)

7 Stem Options

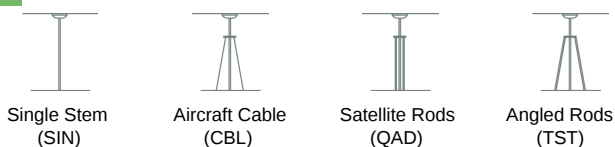

1

Fixture #

2

Finish
(Finish)

3

Lamping

4

Color Temp

5

Dimming

6

Voltage

7

Stem