


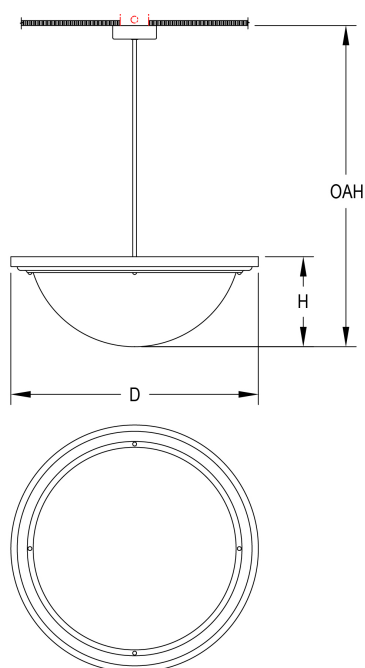

1 Fixture Number

DP-290 10"H x 23" Dia. 36" Oah.
DP-292 11.5"H x 31.5" Dia. 49" Oah.
DP-296 13.5"H x 40" Dia. 63" Oah.

2 Finish

Brushed Solid Aluminum (BA)
Standard Painted Finishes (PT)
Polished Brass (PB)
Solid Antique Brass (SAB)
Faux Antique Brass (FAB)

3 Lamping

All LED options include integral 120-277v 1-100% dimming drivers compatible with 0-10v, Triac, and ELV controls. Over-current and short-circuit protected. All LEDs are 80+ CRI, 50,000 hr. L70. Wattage listed includes driver efficiency.

DP-290

LED Options	Lumens	Wattage
B64 Uplight + Downlight	2545 up/1855 down (delivered)	64

Non-LED Lamps

3N100: (3) 100 watt incandescent

DP-292

LED Options	Lumens	Wattage
B129 Uplight + Downlight	5091 up/3710 down (delivered)	129

Non-LED Lamps

4N100: (4) 100 watt incandescent

DP-296

LED Options	Lumens	Wattage
B192 Uplight + Downlight	7696 up/5565 down (delivered)	192

Non-LED Lamps

6N100: (6) 100 watt incandescent

4 LED Color Temp

27: 2700K
30: 3000K
35: 3500K
40: 4000K

5 LED Dimming

D0: 0-10v
D1: Triac (Leading Edge)*
D2: ELV (Trailing Edge)


6 Voltage Options

120: 120 volt
277: 277 volt (Not available with incandescent lamp options)

7 Diffuser Options

WH: White Acrylic
FX: Faux Alabaster Acrylic

8 Stem Options

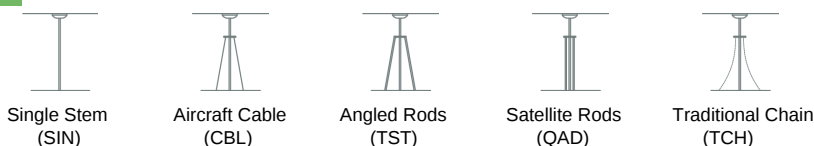

1

Fixture #

2

Finish
(Finish)

3

Lamping

4

Color Temp

5

Dimming

6

Voltage

7

Diffuser

8

Stem