

UPDATED 8/15

718 ADA LED Optional

WEDGE DOWNLIGHT
WET LOCATION

Design
Sustainability
Value



Shown in Natural Bronze.

COMPANION



FEATURES

- ADA version of the wedge family.
- Solid bronze or stainless steel construction ensures long life.
- Cutoff design combined with low glare.
- Available with CF or LED lamping.

MATERIALS

- Solid bronze or stainless steel hood. Aluminum is used for painted finishes. Cast aluminum backplate is painted to match hood finish.
- High transmission clear refractive acrylic lens.
- Aluminum hexcel louver.

FINISHES

- | | |
|----------------------------------|--|
| NBZ Natural Bronze | CAA Clear Anodized Aluminum |
| SSS Satin Stainless Steel | CCP Custom Color Painted finish |
| SGB Semi-Gloss Black | SGS Semi-Gloss Silver |
| SGW Semi-Gloss White | |
| SGBZ Semi-Gloss Bronze | |

LAMPING

- 1-CF13TTT,2Gx7 base. Lamp not included.
LED: 1-9W array, 1210 lumens, 3000K & 80CRI. LED array is included in a holder and is replaceable.

BALLAST/DRIVER

- CF:** Integral electronic HPF, 120V/277V.
LED: Integral driver is 120/277V and 0-10V dimmable.
 Triac dimming available.

ECO INFO

METALS: Hood is made from bronze with 90% recycled content or for painted finishes, aluminum with 30-40% recycled content. Backplate is made from 100% recycled aluminum. All metals are valuable and recyclable at the end of the product's useful life. For more information see "GENERAL INFO."



FINISHING: Solid, natural metal finishes are hand satined. No paint or lacquer is used on the hood in order to avoid pollution associated with the manufacture and application of these substances. Paint finishes are low VOC and oven cured.

ENERGY: Designed for compact fluorescent lamps using electronic ballasts or LEDs.



Shown in Clear Anodized Aluminum.


718

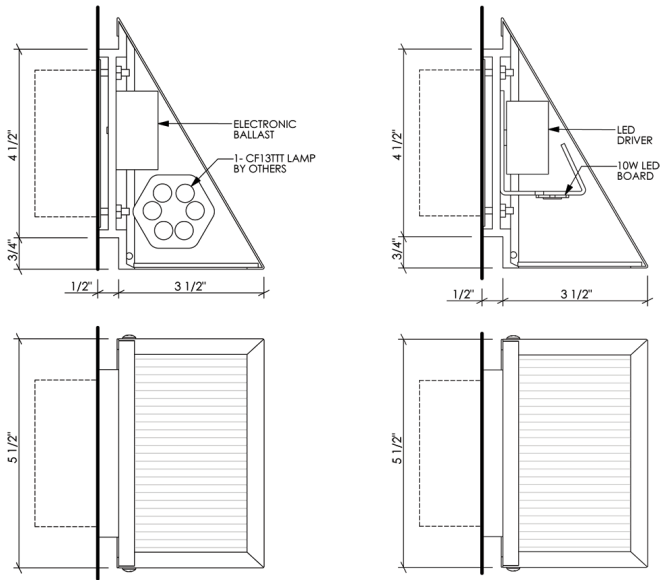

PHOTOMETRICS

See LSI Report No. 27,864 for model 718-LED.

Note: Test was done with an LED rated at 420 lm. new LED is rated at 1210 lm or 188% more. Adjust light levels accordingly.

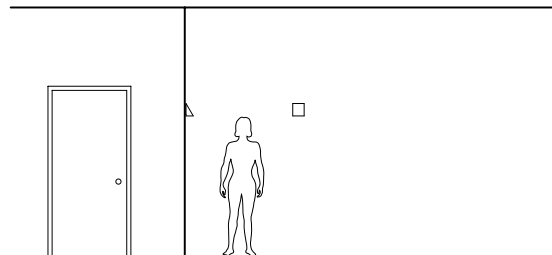

OPTIONS

LENS: High transmission clear refractive acrylic is standard. For optional hexcel louver, specify **HXL**.

NOTE: The optional hexcel open cell louver offers lower glare with higher output directly below the fixture, but less light to the sides and front.

EMERGENCY BATTERY PACK: Remote mounted EBP, specify **REM**. Not available for **LED**.

NOTE: This fixture is suitable for wet or dry locations. For wet locations use only as a downlight.

MOUNTING: Standard J-box or plaster ring.

WEIGHT: 4 lbs

VARIATIONS / MODIFICATIONS

- Special finishes
- Special sizes

SPEC GUIDE SAMPLE SPEC: 718-LED/10-120-NBZ

CAT#	LAMPING	VOLT	FINISH	OPTION
<input type="checkbox"/> 718	<input type="checkbox"/> CF1/13 <input type="checkbox"/> LED 1/9	<input type="checkbox"/> 120 <input type="checkbox"/> 120/277 DIM	<input type="checkbox"/> NBZ <input type="checkbox"/> SSS <input type="checkbox"/> SGB <input type="checkbox"/> SGW <input type="checkbox"/> SGBZ <input type="checkbox"/> CCP <input type="checkbox"/> CAA <input type="checkbox"/> SGS	<input type="checkbox"/> HXL <input type="checkbox"/> REM



Our fixtures are handcrafted here in the USA using the highest quality materials.

