

UPDATED 8/15

**919-AL** NEW

**919-WD** NEW

**DOWNLIGHT BOLLARD**  
**WET LOCATION**

Design  
Sustainability  
Value



919 - WD Shown in Natural Bronze ("factory bright") with Cedar post.

COMPANIONS



M919-AL Shown with 4x4 aluminum post.

**FEATURES**

- Classic wedge mounted to a wood or aluminum post.
- Wood post is cedar and is for direct burial.
- Aluminum post version is available for direct burial or base plate mounting.

**MATERIALS**

- Solid bronze or stainless steel hood. Aluminum is used for painted finishes. Cast aluminum backplate is painted to match hood finish.
- High transmission clear refractive acrylic lens.
- Wood post is rough Western Red Cedar, unfinished.
- Aluminum post with painted finish.

**FINISHES**

- |                                  |  |
|----------------------------------|--|
| <b>NBZ</b> Natural Bronze        | <b>SGBZ</b> Semi-Gloss Bronze          |
| <b>SSS</b> Satin Stainless Steel | <b>SGS</b> Semi-Gloss Silver           |
| <b>SGB</b> Semi-Gloss Black      | <b>CCP</b> Custom Color Painted Finish |
| <b>SGW</b> Semi-Gloss White      |  |

**LAMPING**

**CF:** 1-CF13DTTT, G24q base or 1-CF18WTTT, 2Gx24q.  
Lamps not included.

**LED:** 1-11W LED array, 1550 lumens or 1-16W, 2120 lumens.  
Both are 3000K, 80+ CRI. LED arrays are included and easily changed.

**BALLAST/DRIVER**

**CF:** Integral electronic HPF, 127/277V.


**LED:** Integral HPF electronic driver, 120/277 volt, 0-10V dimming. 2-wire triac dimming available for 120V.



# 919 DOWNLIGHT BOLLARD



919-WD Showing power feed.

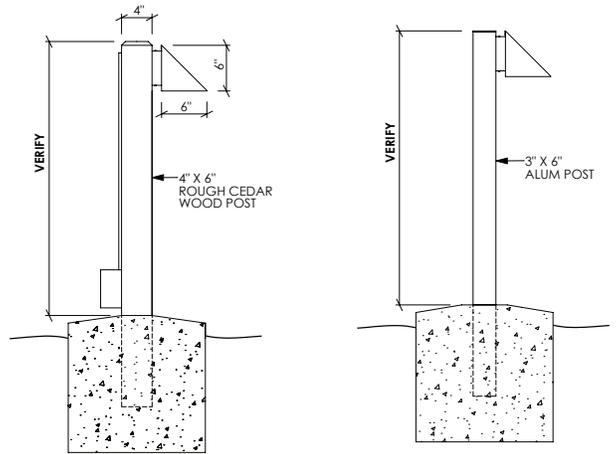

919-WD

919-AL-DB

## POST AND MOUNTING OPTIONS

**919-WD:** The wood post is a rough 4"x 6" cedar for direct burial only. See photo above for power feed.


**919-AL:** The 3"x 6" aluminum post is available for direct burial, specify **AL-DB** or for base plate mounting, specify **AL-BP**.




### PHOTOMETRICS

**CF:** Use LSI Report No. 26216 for model 720, using a 26W lamp. Adjust lumens accordingly.

**LED:** Light Lab Report No LLI-15174-1 was tested with an 11W LED rated at 1350 lumens; new LED is 12W and is rated for 1550 lumens, or 17%. Adjust light levels accordingly.



Base plate mounting detail.

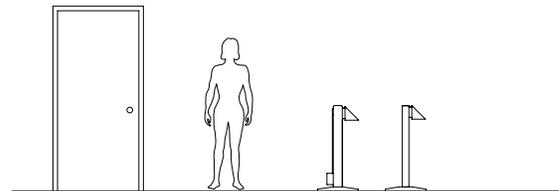

## SPEC GUIDE

SAMPLE SPEC: 919-WD-LED/11-120-NBZ-36" OA

CAT#	POST	LAMPING	VOLT	FINISH	OA
<input type="checkbox"/> 919	<input type="checkbox"/> AL-DB <input type="checkbox"/> AL-BP <input type="checkbox"/> WD	<input type="checkbox"/> CF/13 <input type="checkbox"/> CF/18 <input type="checkbox"/> LED/11 <input type="checkbox"/> LED/16	<input type="checkbox"/> 120	<input type="checkbox"/> NBZ <input type="checkbox"/> SSS <input type="checkbox"/> SGB <input type="checkbox"/> SGW <input type="checkbox"/> SGBZ <input type="checkbox"/> SGS <input type="checkbox"/> CCP	<input type="checkbox"/> 36" STD



IBEW Labeled



Our fixtures are handcrafted here in the USA using the highest quality materials.

