

# **INDIRECT BOLLARD**





**COMPANIONS** 





Showing broad indirect distribution.

### **FEATURES**

- Broad, smooth and glare-free indirect lighting.
- Dark Sky compliant.
- Cast aluminum hood is vandal resistant.
- Available with two hood styles.
- Available for direct burial or base plate mounting.

## **MATERIALS**

- Cast aluminum hood and collar.
- Extruded aluminum post.

#### **FINISHES**

SGB Semi-Gloss Black Semi-Glosss White SGW Semi-Gloss Silver SGS SGBZ Semi-Gloss Bronze

CCP **Custom Color Painted Finish** 


### **LAMPING**

1-9W LED array, 1210 lumens, 1-14W array, 1650 lumens or 1-16W array, 2120 lumens. All are 3000K, 80+ CRI; Note: 2700K and 4000K available.


LED arrays are included and are easily replaced.

# **DRIVER**

Integral HPF electronic driver, 120/277 volt, 0-10V dimmable. 2-wire triac dimming available for 120V.

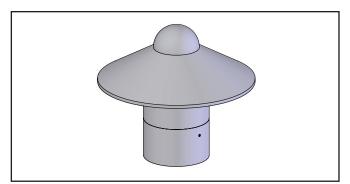

Dome Hood **DH** 




Flat Hood FH

# **OPTIONS**


Hood: The 923 is available with two different style hoods. For the more contemporary flat top style, specify FH. For the dome style hood specify DH.

Mounting: Available for direct burial, specify DB or base plate mounting, specify BP.



Base plate mounting detail.


# 923 **INDIRECT BOLLARD**





#### **PHOTOMETRICS**

Light Lab Report NO LLI-15174-2 was tested with a 12W LED rated at 1350lm; new LED is rated at 14W and 1650lm or 22% more. Adjust light levels accordingly.

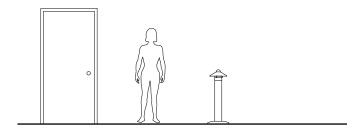

#### **SPEC GUIDE** SAMPLE SPEC:







Our fixtures are handcrafted here in the USA using the highest quality materials.

