

Akron Pendant



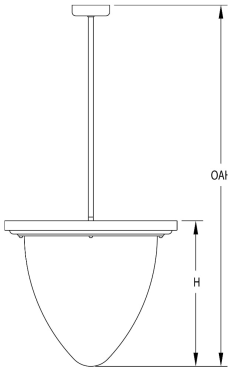



1 Fixture Number

DP-800 11.75"H x 12.75" Dia. 36" Oah.

DP-802 18"H x 19.5" Dia. 48" Oah.

2 Finish

Housing, Stem & Canopy

Standard Painted Finishes (PT)

3 Lamping

LED option includes integral 120-277v 1-100% dimming driver compatible with 0-10v, Triac, and ELV controls. Over-current and short-circuit protected. All LEDs are 80+ CRI, 50,000 hr. L70. Wattage listed includes driver efficiency.

DP-800

LED Options	Lumens	Wattage
A32 Akron	2676 Initial	32

DP-802

LED Options	Lumens	Wattage
A48 Akron	5514 Initial	48

4 LED Color Temp

27: 2700K
30: 3000K
35: 3500K
40: 4000K

5 LED Dimming

D0: 0-10v
D1: Triac (Leading Edge)*
D2: ELV (Trailing Edge)

6 Voltage Options

120: 120 volt
277: 277 volt (Not available with incandescent lamp options)

7 Diffuser Options

WH: White Acrylic

Notes

- OAH is standard unless specified.
- FINISH: Finish is low VOC thermo-cure powdercoat paint or clear lacquer. Specify three digit color suffix with "PT" finish options.
- HOUSING: Consists of a spun aluminum or brass trim ring with an acrylic bowl diffuser and choice of stem kit.
- MOUNTING: Fixture supplied with a painted canopy, 45-degree swivel ball and hanger for mounting to standard octagon junction box.
- ETL listed to UL standards for dry and damp locations
- *Surge protection recommended for use with D1 (Triac/Leading Edge) dimming systems.

1	2	3	4	5	6	7
Fixture #	Housing, Stem (Finish)	Lamping	Color Temp	Dimming	Voltage	Diffuser

©2018 Manning Lighting Inc. Sheboygan, WI 53083 Phone: 920-458-2184 Web: manningltg.com Email: info@manningltg.com Design modification rights reserved. Made in USA.