


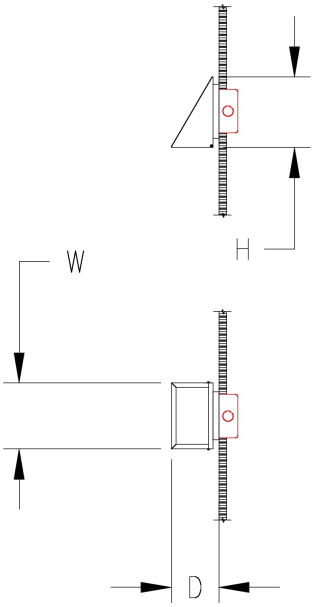

Notes

- ETL listed to UL standards for dry, damp, or wet locations.
- HOUSING: Formed aluminum housing with aluminum backplate. High transmission clear refractive acrylic lens.
- FINISH: Finish is low VOC thermo-cure powdercoat paint. Specify three digit color suffix with "PT" finish options.
- DRIVER: Integral LED driver compatible with 0-10v, Triac, or ELV dimming.
- MOUNTING: Fixture for installation over standard octagonal junction box.

1 **Fixture Number**

B-718 5.5"W x 6"H x 4" Ext.

2 **Finish**

Housing

Standard Painted Finishes (PT)

3 **Lamping**

Includes integral 120-277v 1-100% dimming driver compatible with 0-10v, Triac, and ELV controls. Over-current and short-circuit protected. All LEDs are 80+ CRI, 50,000 hr. L70. Wattage listed includes driver efficiency.

B-718

LED Options	Lumens	Wattage
E13 Downlight	1550 (initial)	13

4 **LED Color Temp**

27: 2700K
30: 3000K
35: 3500K
40: 4000K

5 **LED Dimming**

D0: 0-10v
D1: Triac (Leading Edge)*
D2: ELV (Trailing Edge)

6 **Voltage Options**

120: 120 volt
277: 277 volt (Not available with incandescent lamp options)

7 **Diffuser Options**

CRA: Clear refractive acrylic lens

©2018 Manning Lighting Inc. Sheboygan, WI 53083 Phone: 920-458-2184 Web: manningltg.com Email: info@manningltg.com Design modification rights reserved. Made in USA.