

Column Rail Sconce





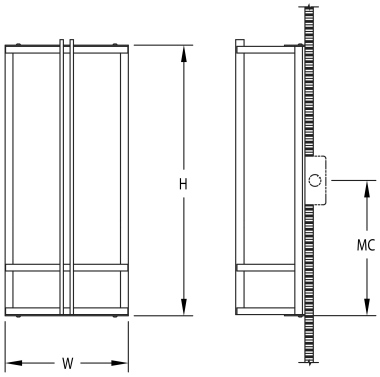

Notes

- FINISH: Finish is low VOC thermo-cure powdercoat paint or clear lacquer. Specify three digit color suffix with "PT" finish options.
- HOUSING: Solid machined aluminum or brass bar details and extruded aluminum corner posts. Thermoformed acrylic half cylinder.
- MOUNTING: Fixture mounts to a standard octagonal junction box.
- ETL listed to UL standards for dry and damp locations
- *Surge protection recommended for use with D1 (Triac/Leading Edge) dimming systems.

1 Fixture Number

DS-610	7.25"W	x	16.25"H	x 4" Ext.
DS-612	9.25"W	x	20.25"H	x 5" Ext.
DS-614	9.25"W	x	28.25"H	x 5" Ext.

2 Finish

End Caps & Frame

- Brushed Solid Aluminum (BA)
- Polished Brass (PB)
- Standard Painted Finishes (PT)

Trim Bars

- Brushed Solid Aluminum (BA)
- Polished Brass (PB)
- Standard Painted Finishes (PT)

3 Lamping

LED options includes integral 120-277v 1-100% dimming driver compatible with 0-10v, Triac, and ELV controls. Over-current and short-circuit protected. All LEDs are 80+ CRI, 50,000 hr. L70. Wattage listed includes driver efficiency.

DS-610

LED Options	Lumens	Wattage
S7	612 (delivered)	7

Non-LED Lamps

2NT60: (2) 60 watt T-10 incandescent

DS-612

LED Options	Lumens	Wattage
S16	995 (delivered)	16

Non-LED Lamps

2N60: (2) 60 watt incandescent

DS-614

LED Options	Lumens	Wattage
S16	995 (delivered)	16

Non-LED Lamps

3N60: (3) 60 watt incandescent

4 LED Color Temp

- 27: 2700K
- 30: 3000K
- 35: 3500K
- 40: 4000K

5 LED Dimming

- D0: 0-10v
- D1: Triac (Leading Edge)*
- D2: ELV (Trailing Edge)

6 Voltage Options

- 120: 120 volt
- 277: 277 volt (Not available with incandescent lamp options)

7 Diffuser Options

- WH: White Acrylic
- FX: Faux Alabaster Acrylic

8 Fixture Options

- BL: Bottom Lens (included with LED options)
- TL: Top Lens (included with LED options)

1	2	2	3	4	5	6	7	8
Fixture #	End Caps & Fra (Finish)	Trim Bars (Finish)	Lamping	Color Temp	Dimming	Voltage	Diffuser	Fixture Option

©2018 Manning Lighting Inc. Sheboygan, WI 53083 Phone: 920-458-2184 Web: manningltg.com Email: info@manningltg.com Design modification rights reserved. Made in USA.