
Creekside Exterior Sconce



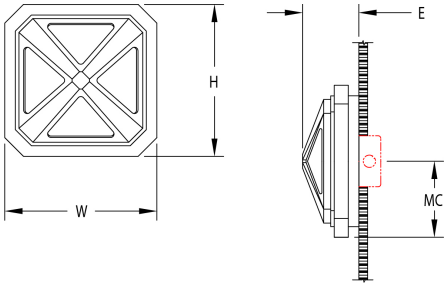

Notes

- FINISH: Finish is low VOC thermo-cure powdercoat paint. Specify three digit color suffix with "PT" finish options.
- HOUSING: Consists of cast aluminum frame and one-piece impact resistant acrylic diffuser.
- MOUNTING: Fixture mounts to a standard octagonal junction box.
- ETL listed to UL standards for wet locations.

1 Fixture Number

DE-220 11"W x 13.5"H x 4" Ext.

DE-230 15.5"W x 20"H x 5.4" Ext.

2 Finish

Standard Painted Finishes (PT)

3 Lamping

Includes integral wet location rated 120-277v 1-100% dimming driver compatible with 0-10v controls. Over-current and short-circuit protected. All LEDs are 80+ CRI, 50,000 hr. L70. Wattage listed includes driver efficiency.

DE-220

LED Options	Lumens	Wattage
E7	401 (initial)	7

DE-230

LED Options	Lumens	Wattage
E11	818 (initial)	11

4 LED Color Temp

27: 2700K

30: 3000K

35: 3500K

40: 4000K

5 LED Dimming

D0: 0-10v

6 Voltage Options

120: 120 volt

277: 277 volt (Not available with incandescent lamp options)

7 Diffuser Options

WH: White Acrylic

1 Fixture # | 2 Finish (Finish) | 3 Lamping | 4 Color Temp | 5 Dimming | 6 Voltage | 7 Diffuser

©2018 Manning Lighting Inc. Sheboygan, WI 53083 Phone: 920-458-2184 Web: manningltg.com Email: info@manningltg.com Design modification rights reserved. Made in USA.