

## Notes

- OAH is standard unless specified.
- FINISH: Finish is low VOC thermo-cure powdercoat paint or clear lacquer. Specify three digit color suffix with "PT" finish options.
- HOUSING: Consists of spun aluminum housing clad with stainless steel or aluminum textured metal trim. Opal white acrylic diffuser.
- MOUNTING: Fixture mounts to a standard octagonal junction box.
- UL and C-UL listed for dry or damp locations.
- \*Surge protection recommended for use with D1 (Triac/Leading Edge) dimming systems.

### 1 Fixture Number

- DP-891** 5.75"H x 23.5" Dia. 32" Oah.
- DP-893** 8"H x 29" Dia. 34" Oah.
- DP-895** 9.75"H x 34.25" Dia. 36" Oah.

### 2 Finish

- |                                |                                   |
|--------------------------------|-----------------------------------|
| <b>Housing</b>                 | <b>Textured metal accent trim</b> |
| Standard Painted Finishes (PT) | Standard Painted Finishes (PT)    |
| Brushed Solid Aluminum (BA)    | Stainless Steel (SS)              |

### 3 Lamping

All LED options include integral 120-277v 1-100% dimming drivers compatible with 0-10v, Triac, and ELV controls. All LEDs are 80+ CRI, 50,000 hr. L70. Wattage listed includes driver efficiency.

#### DP-891

LED Options	Lumens	Wattage
B48 Downlight + Uplight (48w)	1402 up/1533 down (delivered)	48
B48R Uplight + Downlight (48w)	2804 up/766 down (delivered)	48

#### Non-LED Lamps

4F39: (4) 39 watt compact fluorescent

#### DP-893

LED Options	Lumens	Wattage
B96 Downlight + Uplight (96w)	2804 up/3066 down (delivered)	96
B96R Uplight + Downlight (96w)	5608 up/1533 down (delivered)	96

#### Non-LED Lamps

4F40: (4) 40 watt compact fluorescent

#### DP-895

LED Options	Lumens	Wattage
B128 Downlight + Uplight (128w)	2804 up/4599 down (delivered)	128
B128R Uplight + Downlight (128w)	8412 up/1533 down (delivered)	128

#### Non-LED Lamps

6F40: (6) 40 watt compact fluorescent

### 4 LED Color Temp

- 27: 2700K
- 30: 3000K
- 35: 3500K
- 40: 4000K

### 5 LED Dimming

- D0: 0-10v
- D1: Triac (Leading Edge)\*
- D2: ELV (Trailing Edge)


### 6 Voltage Options

- 120: 120 volt
- 277: 277 volt (Not available with incandescent lamp options)


### 7 Diffuser Options

- WH: Opal White Acrylic

### 8 Panel Options

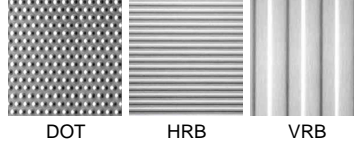

### 9 Stem Options

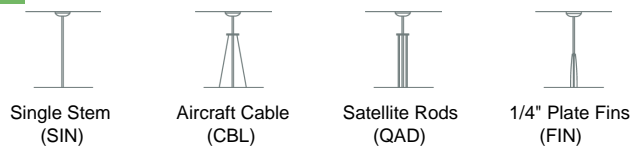

### 10 Fixture Options

- FU: Fusing
- EMI: Integral Emergency Battery (Fluor.)
- DM: Fluorescent Dimming

1	2	2	3	4	5	6	7	8	9	10
Fixture #	Housing (Finish)	Textured metal (Finish)	Lamping	Color Temp	Dimming	Voltage	Diffuser	Panel	Stem	Fixture Option