
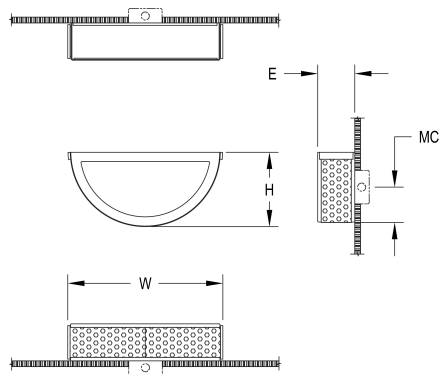


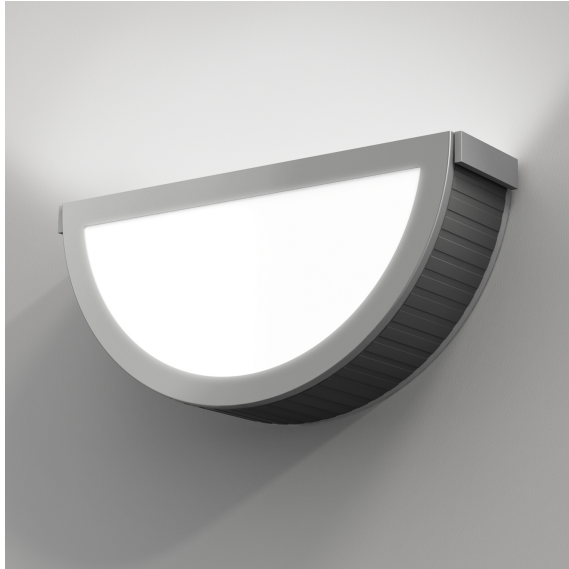

Notes

- FINISH: Finish is low VOC thermo-cure powdercoat paint or clear lacquer. Specify three digit color suffix with "PT" finish options.
- HOUSING: Consists of spun aluminum housing clad with stainless steel or aluminum textured metal trim. Opal white acrylic diffuser.
- MOUNTING: Fixture mounts to a standard octagonal junction box.
- ETL listed to UL standards for dry and damp locations
- *Surge protection recommended for use with D1 (Triac/Leading Edge) dimming systems.

1 Fixture Number
DS-890 17.25"W x 10"H x 4" Ext.

2 Finish
Housing
Standard Painted Finishes (PT)
Brushed Solid Aluminum (BA)

Textured metal accent trim
Standard Painted Finishes (PT)
Stainless Steel (SS)

3 Lamping
LED options includes integral 120-277v 1-100% dimming driver compatible with 0-10v, Triac, and ELV controls. Over-current and short-circuit protected. All LEDs are 80+ CRI, 50,000 hr. L70. Wattage listed includes driver efficiency.


LED Options	Lumens	Wattage
S7	612 (delivered)	7

4 LED Color Temp
27: 2700K
30: 3000K
35: 3500K
40: 4000K

5 LED Dimming
D0: 0-10v
D1: Triac (Leading Edge)*
D2: ELV (Trailing Edge)

6 Voltage Options
120: 120 volt
277: 277 volt (Not available with incandescent lamp options)

7 Diffuser Options
WH: White Acrylic

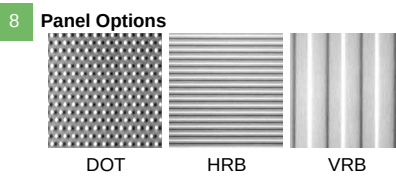

1

Fixture #

2

Housing
(Finish)

2

Textured metal
(Finish)

3

Lamping

4

Color Temp

5

Dimming

6

Voltage

7

Diffuser

8

Panel