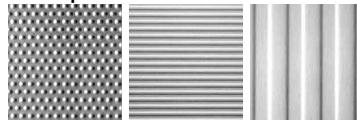


1	Fixture Number DC-891 7.25"H x 23.5" Dia.									
2	Finish									
	Housing Standard Painted Finishes (PT) Brushed Solid Aluminum (BA)									
	Textured metal accent trim Standard Painted Finishes (PT) Stainless Steel (SS)									
3	Lamping All LED options include integral 120-277v 1-100% dimming drivers compatible with 0-10v, Triac, and ELV controls. Over-current and short-circuit protected. All LEDs are 80+ CRI, 50,000 hr. L70. Wattage listed includes driver efficiency. DC-891									
	<table border="1"> <thead> <tr> <th>LED Options</th> <th>Lumens</th> <th>Wattage</th> </tr> </thead> <tbody> <tr> <td>C26</td> <td>2178 (delivered)</td> <td>26</td> </tr> <tr> <td>C38</td> <td>3118 (delivered)</td> <td>38</td> </tr> </tbody> </table>	LED Options	Lumens	Wattage	C26	2178 (delivered)	26	C38	3118 (delivered)	38
LED Options	Lumens	Wattage								
C26	2178 (delivered)	26								
C38	3118 (delivered)	38								
4	LED Color Temp 27: 2700K 30: 3000K 35: 3500K 40: 4000K									
5	LED Dimming D0: 0-10v D1: Triac (Leading Edge)* D2: ELV (Trailing Edge)									
6	Voltage Options 120: 120 volt 277: 277 volt (Not available with incandescent lamp options)									
7	Diffuser Options WH: White Acrylic									
8	Panel Options  DOT HRB VRB									

1	2	2	3	4	5	6	7	8
Fixture #	Housing (Finish)	Textured metal (Finish)	Lamping	Color Temp	Dimming	Voltage	Diffuser	Panel