

**1 Fixture Number**

- LP-390** 8"H x 18" Dia. 34" Oah.
- LP-392** 9"H x 24" Dia. 35" Oah.

**2 Finish**

- |                                |                                |
|--------------------------------|--------------------------------|
| <b>Primary Finish</b>          | <b>Secondary Finish</b>        |
| Brushed Solid Aluminum (BA)    | Brushed Solid Aluminum (BA)    |
| Standard Painted Finishes (PT) | Standard Painted Finishes (PT) |

**3 Lamping**

LED options includes integral 120-277v 1-100% dimming driver compatible with 0-10v, Triac, and ELV controls. Over-current and short-circuit protected. All LEDs are 80+ CRI, 50,000 hr. L70. Wattage listed includes driver efficiency.

**LP-390**

LED Options	Lumens	Wattage
B32 Uplight + Downlight	1097 up/1097 down (delivered)	32

**Non-LED Lamps**

3N60: (3) 60 watt incandescent

**LP-392**

LED Options	Lumens	Wattage
B48 Downlight + Uplight (48w)	1402 up/1533 down (delivered)	48

**Non-LED Lamps**

3N60: (3) 60 watt incandescent

**4 LED Color Temp**

- 27: 2700K
- 30: 3000K
- 35: 3500K
- 40: 4000K

**5 LED Dimming**

- D0: 0-10v
- D1: Triac (Leading Edge)\*
- D2: ELV (Trailing Edge)


**6 Voltage Options**

- 120: 120 volt
- 277: 277 volt (Not available with incandescent lamp options)

**7 Diffuser Options**

- WH: White Acrylic
- CD: Ambia configured diffuser (specify option)

**8 Stem Options**

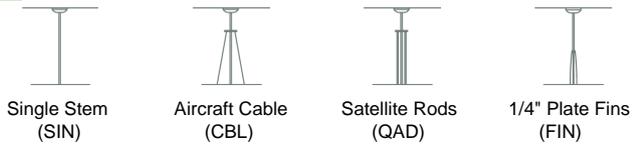

1

2

2

3

4

5

6

7

8

Fixture #

Primary Finish  
(Finish)

Secondary Fini  
(Finish)

Lamping

Color Temp

Dimming

Voltage

Diffuser

Stem