

## Notes

- OAH is standard unless specified.
- FINISH: Finish is low VOC thermo-cure powdercoat paint. Specify three digit color suffix with "PT" finish options.
- HOUSING: Heavy gauge spun solid aluminum drum, hardware, and solid aluminum trim panels can be ordered with complementary finishes. Solid aluminum lamp plate reflector is coated with a reflective white enamel finish.
- MOUNTING: Fixture is supplied with a universal mounting strap assembly that attaches to a standard octagonal junction box.
- ETL listed to UL standards for dry and damp locations
- \*Surge protection recommended for use with D1 (Triac/Leading Edge) dimming systems.

### 1 Fixture Number

**LP-390** 8"H x 18" Dia. 34" Oah.  
**LP-392** 9"H x 24" Dia. 35" Oah.

### 2 Finish

#### Primary Finish

Brushed Solid Aluminum (BA)  
 Standard Painted Finishes (PT)

#### Secondary Finish

Brushed Solid Aluminum (BA)  
 Standard Painted Finishes (PT)

### 3 Lamping

LED options includes integral 120-277v 1-100% dimming driver compatible with 0-10v, Triac, and ELV controls. Over-current and short-circuit protected. All LEDs are 80+ CRI, 50,000 hr. L70. Wattage listed includes driver efficiency.

#### LP-390

LED Options	Lumens	Wattage
B32 Uplight + Downlight	1097 up/1097 down (delivered)	32

#### Non-LED Lamps

3N60: (3) 60 watt incandescent

#### LP-392

LED Options	Lumens	Wattage
B48 Downlight + Uplight (48w)	1402 up/1533 down (delivered)	48

#### Non-LED Lamps

3N60: (3) 60 watt incandescent

### 4 LED Color Temp

27: 2700K  
 30: 3000K  
 35: 3500K  
 40: 4000K

### 5 LED Dimming

D0: 0-10v  
 D1: Triac (Leading Edge)\*  
 D2: ELV (Trailing Edge)


### 6 Voltage Options

120: 120 volt  
 277: 277 volt (Not available with incandescent lamp options)

### 7 Diffuser Options

WH: White Acrylic  
 CD: Ambia configured diffuser (specify option)

### 8 Stem Options

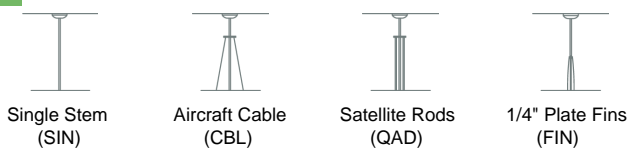

1

Fixture #

2

Primary Finish  
(Finish)

2

Secondary Fini  
(Finish)

3

Lamping

4

Color Temp

5

Dimming

6

Voltage

7

Diffuser

8

Stem