
Fleur Arm Sconce



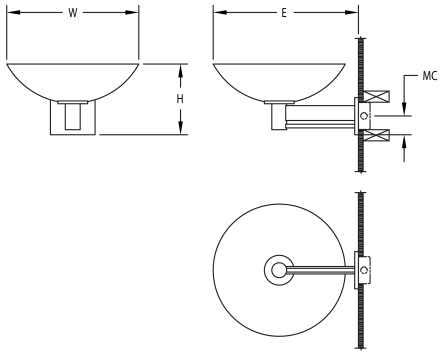

Notes

- FINISH: Finish is low VOC thermo-cure powdercoat paint or clear lacquer. Specify three digit color suffix with "PT" finish options.
- HOUSING: Consists of an acrylic bowl diffuser, extruded aluminum or brass rectangular support arm and a fabricated aluminum or brass wall plate.
- MOUNTING: Fixture mounts to standard octagonal junction box. Additional structural blocking required to support fixture.
- ETL listed to UL standards for dry and damp locations
- *Surge protection recommended for use with D1 (Triac/Leading Edge) dimming systems.

1 Fixture Number

DS-211 17.75"W x 9.5"H x 19.5" Ext.

DS-213 25.75"W x 10.5"H x 27.5" Ext.

2 Finish

Brushed Solid Aluminum (BA)
Standard Painted Finishes (PT)
Polished Brass (PB)

3 Lamping

LED options includes integral 120-277v 1-100% dimming driver compatible with 0-10v, Triac, and ELV controls. Over-current and short-circuit protected. All LEDs are 80+ CRI, 50,000 hr. L70. Wattage listed includes driver efficiency.

DS-211

LED Options	Lumens	Wattage
S32	3440 (initial)	32

Non-LED Lamps

3N100: (3) 100 watt incandescent

DS-213

LED Options	Lumens	Wattage
S65	6995 (initial)	65

Non-LED Lamps

4N100: (4) 100 watt incandescent

4 LED Color Temp

27: 2700K
30: 3000K
35: 3500K
40: 4000K

5 LED Dimming

D0: 0-10v
D1: Triac (Leading Edge)*
D2: ELV (Trailing Edge)

6 Voltage Options

120: 120 volt
277: 277 volt (Not available with incandescent lamp options)

7 Diffuser Options

WH: White Acrylic
FX: Faux Alabaster Acrylic

1	2	3	4	5	6	7
Fixture #	Finish (Finish)	Lamping	Color Temp	Dimming	Voltage	Diffuser

©2018 Manning Lighting Inc. Sheboygan, WI 53083 Phone: 920-458-2184 Web: manningltg.com Email: info@manningltg.com Design modification rights reserved. Made in USA.