

## Notes

- OAH is standard unless specified.
- FINISH: Finish is low VOC thermo-cure powdercoat paint or clear lacquer. Specify three digit color suffix with "PT" finish options.
- HOUSING: Consists of an acrylic bowl diffuser with spun aluminum or brass finial pan and optional "QAD" stem kit.
- MOUNTING: Fixture supplied with a painted canopy, 45-degree swivel ball and hanger for mounting to standard octagon junction box.
- ETL listed to UL standards for dry and damp locations
- \*Surge protection recommended for use with D1 (Triac/Leading Edge) dimming systems.

### 1 Fixture Number

- DP-280** 6"H x 17.75" Dia. 32" Oah.  
**DP-282** 7"H x 25.75" Dia. 45" Oah.  
**DP-286** 9.5"H x 33.5" Dia. 59" Oah.

### 2 Finish

- Brushed Solid Aluminum (BA)  
 Standard Painted Finishes (PT)  
 Polished Brass (PB)

### 3 Lamping

All LED options include integral 120-277v 1-100% dimming drivers compatible with 0-10v, Triac, and ELV controls. Over-current and short-circuit protected. All LEDs are 80+ CRI, 50,000 hr. L70. Wattage listed includes driver efficiency.

#### DP-280

LED Options	Lumens	Wattage
B32 Uplight + Downlight	1097 up/1097 down (delivered)	32

#### Non-LED Lamps

3N100: (3) 100 watt incandescent

#### DP-282

LED Options	Lumens	Wattage
B64 Uplight + Downlight	2545 up/1855 down (delivered)	64

#### Non-LED Lamps

4N100: (4) 100 watt incandescent

#### DP-286

LED Options	Lumens	Wattage
B145R Uplight + Downlight	8309 up/2782 down (delivered)	145

#### Non-LED Lamps

6N100: (6) 100 watt incandescent

### 4 LED Color Temp

- 27: 2700K  
 30: 3000K  
 35: 3500K  
 40: 4000K

### 5 LED Dimming

- D0: 0-10v  
 D1: Triac (Leading Edge)\*  
 D2: ELV (Trailing Edge)


### 6 Voltage Options

- 120: 120 volt  
 277: 277 volt (Not available with incandescent lamp options)

### 7 Diffuser Options

- WH: White Acrylic  
 FX: Faux Alabaster Acrylic

### 8 Stem Options

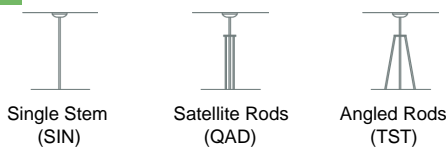

1	2	3	4	5	6	7	8
Fixture #	Finish (Finish)	Lamping	Color Temp	Dimming	Voltage	Diffuser	Stem