

Notes

- OAH is standard unless specified.
- FINISH: Finish is low VOC thermo-cure powdercoat paint or clear lacquer. Specify three digit color suffix with "PT" finish options.
- HOUSING: Consists of an acrylic bowl diffuser with a spun aluminum or brass downlight bezel and optional "QAD" stem kit.
- MOUNTING: Fixture supplied with a painted canopy, 45-degree swivel ball and hanger for mounting to standard octagon junction box.
- ETL listed to UL standards for dry and damp locations
- *Surge protection recommended for use with D1 (Triac/Leading Edge) dimming systems.

1 Fixture Number

- DP-272** 6.25"H x 26" Dia. 39" Oah.
- DP-276** 8.25"H x 34 Dia. 51" Oah.

2 Finish

- Brushed Solid Aluminum (BA)
- Standard Painted Finishes (PT)
- Polished Brass (PB)

3 Lamping

All LED options include integral 120-277v 1-100% dimming drivers compatible with 0-10v, Triac, and ELV controls. Over-current and short-circuit protected. All LEDs are 80+ CRI, 50,000 hr. L70. Wattage listed includes driver efficiency.

DP-272

LED downlight is Cree COB array producing 4984 initial lumens at 3500K.

LED Options	Lumens	Wattage
B144 Uplight + Downlight	10320 bowl/4984 down (initial)	144

Non-LED Lamps

6N100 / 1QP120: (6) 100 watt incandescent & (1) 120 watt PAR 38 quartz halogen

DP-276

LED downlight is Cree COB array producing 6664 initial lumens at 3500K.

LED Options	Lumens	Wattage
B183 Uplight + Downlight	13760 bowl/6664 down (initial)	183

Non-LED Lamps

6N100 / 1QP250: (6) 100 watt incandescent & (1) 250 watt PAR38 med. base

4 LED Color Temp

- 27: 2700K
- 30: 3000K
- 35: 3500K
- 40: 4000K

5 LED Dimming

- D0: 0-10v
- D1: Triac (Leading Edge)*
- D2: ELV (Trailing Edge)


6 Voltage Options

- 120: 120 volt
- 277: 277 volt (Not available with incandescent lamp options)

7 Diffuser Options

- WH: Opal White Acrylic
- FX: Faux Alabaster Acrylic

8 Stem Options

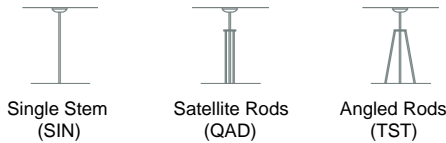

1	2	3	4	5	6	7	8
Fixture #	Finish (Finish)	Lamping	Color Temp	Dimming	Voltage	Diffuser	Stem