
# Fleur Pendant with Downlight





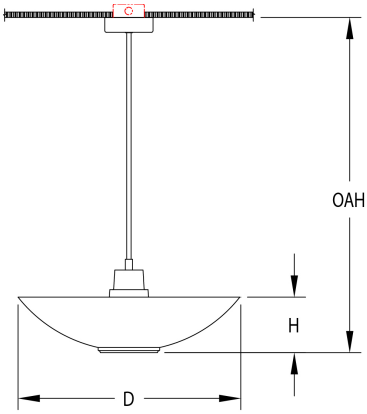


## Notes

- OAH is standard unless specified.
- FINISH: Finish is low VOC thermo-cure powdercoat paint or clear lacquer. Specify three digit color suffix with "PT" finish options.
- HOUSING: Consists of an acrylic bowl diffuser with a spun aluminum or brass downlight bezel and optional "QAD" stem kit.
- MOUNTING: Fixture supplied with a painted canopy, 45-degree swivel ball and hanger for mounting to standard octagon junction box.
- ETL listed to UL standards for dry and damp locations
- *Surge protection recommended for use with D1 (Triac/Leading Edge) dimming systems.

**1 Fixture Number**

| | | |
|---|---|---|
| **DP-272** | 6.25"H x 26" Dia. | 39" Oah. |
| **DP-276** | 8.25"H x 34 Dia. | 51" Oah. |

**2 Finish**

Brushed Solid Aluminum (BA)
Standard Painted Finishes (PT)
Polished Brass (PB)

**3 Lamping**

All LED options include integral 120-277v 1-100% dimming drivers compatible with 0-10v, Triac, and ELV controls. Over-current and short-circuit protected. All LEDs are 80+ CRI, 50,000 hr. L70. Wattage listed includes driver efficiency.

**DP-272**

LED downlight is Cree COB array producing 4984 initial lumens at 3500K.

| LED Options | Lumens | Wattage |
|---|---|---|
| B144 Uplight + Downlight | 10320 bowl/4984 down (initial) | 144 |

**Non-LED Lamps**

6N100 / 1QP120: (6) 100 watt incandescent & (1) 120 watt PAR 38 quartz halogen

**DP-276**

LED downlight is Cree COB array producing 6664 initial lumens at 3500K.

| LED Options | Lumens | Wattage |
|---|---|---|
| B183 Uplight + Downlight | 13760 bowl/6664 down (initial) | 183 |

**Non-LED Lamps**

6N100 / 1QP250: (6) 100 watt incandescent & (1) 250 watt PAR38 med. base

**4 LED Color Temp**

27: 2700K
30: 3000K
35: 3500K
40: 4000K

**5 LED Dimming**

D0: 0-10v
D1: Triac (Leading Edge)*
D2: ELV (Trailing Edge)

**6 Voltage Options**

120: 120 volt
277: 277 volt (Not available with incandescent lamp options)

**7 Diffuser Options**

WH: White Acrylic
FX: Faux Alabaster Acrylic

**8 Stem Options**


Single Stem (SIN)


Satellite Rods (QAD)


Angled Rods (TST)

| 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 |
|---|---|---|---|---|---|---|---|
| Fixture # | Finish (Finish) | Lamping | Color Temp | Dimming | Voltage | Diffuser | Stem |

©2018 Manning Lighting Inc. Sheboygan, WI 53083 Phone: 920-458-2184 Web: manningltg.com Email: info@manningltg.com Design modification rights reserved. Made in USA.