


G2 Exterior Arm Mount Sconce





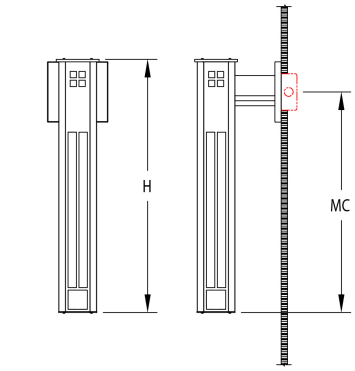



Notes

- FINISH: Finish is low VOC thermo-cure powdercoat paint. Specify three digit color suffix with "PT" finish options.
- HOUSING: Solid aluminum plate top and bottom end caps, extruded aluminum corner posts and laser-cut aluminum accent panel. Extruded aluminum arms and wall plate.
- MOUNTING: Fixture mounts to a standard octagonal junction box.
- ETL listed to UL standards for wet locations.

1 Fixture Number

DE-253	4.3"W	x	21.3"H	x 8.8" Ext.
DE-255	4.3"W	x	25.2"H	x 8.8" Ext.
DE-257	4.3"W	x	31.2"H	x 8.8" Ext.

2 Finish

Trim

Standard Painted Finishes (PT)

Panel

Standard Painted Finishes (PT)
Raw Copper (CU)

3 Lamping

Includes integral wet location rated 120-277v 1-100% dimming driver compatible with 0-10v controls. Over-current and short-circuit protected. All LEDs are 80+ CRI, 50,000 hr. L70. Wattage listed includes driver efficiency.

DE-253

LED Options	Lumens	Wattage
E11	818 (initial)	11

DE-255

LED Options	Lumens	Wattage
E17	1226 (initial)	17

DE-257

LED Options	Lumens	Wattage
E23	1636 (initial)	23

4 LED Color Temp

27: 2700K
30: 3000K
35: 3500K
40: 4000K

5 LED Dimming

D0: 0-10v


6 Voltage Options

120: 120 volt
277: 277 volt (Not available with incandescent lamp options)

7 Diffuser Options

WH: White Acrylic
FX: Faux Alabaster Acrylic

8 Panel Options

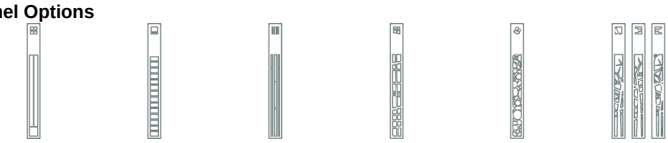

1	2	2	3	4	5	6	7	8
Fixture #	Trim (Finish)	Panel (Finish)	Lamping	Color Temp	Dimming	Voltage	Diffuser	Panel

©2018 Manning Lighting Inc. Sheboygan, WI 53083 Phone: 920-458-2184 Web: manningltg.com Email: info@manningltg.com Design modification rights reserved. Made in USA.