

- 1 Fixture Number**
DE-254 4"W x 21.3"H x 4" Ext.
DE-256 4"W x 25.2"H x 4" Ext.
DE-258 4"W x 31.2"H x 4" Ext.

- 2 Finish**
Trim Standard Painted Finishes (PT)
Panel Standard Painted Finishes (PT)
 Raw Copper (CU)

- 3 Lamping**
 Includes integral wet location rated 120-277v 1-100% dimming driver compatible with 0-10v controls. Over-current and short-circuit protected. All LEDs are 80+ CRI, 50,000 hr. L70. Wattage listed includes driver efficiency.

DE-254

LED Options	Lumens	Wattage
E11	818 (initial)	11

DE-256

LED Options	Lumens	Wattage
E17	1226 (initial)	17

DE-258

LED Options	Lumens	Wattage
E23	1636 (initial)	23


- 4 LED Color Temp**
 27: 2700K
 30: 3000K
 35: 3500K
 40: 4000K

- 5 LED Dimming**
 D0: 0-10v

- 6 Voltage Options**
 120: 120 volt
 277: 277 volt (Not available with incandescent lamp options)

- 7 Diffuser Options**
 WH: White Acrylic
 FX: Faux Alabaster Acrylic

- 8 Panel Options**

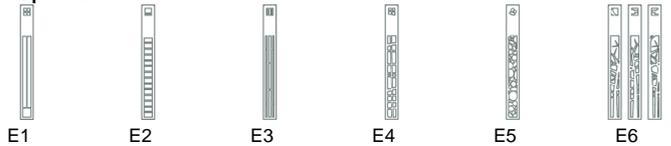

1

Fixture #

2

Trim
(Finish)

2

Panel
(Finish)

3

Lamping

4

Color Temp

5

Dimming

6

Voltage

7

Diffuser

8

Panel