

Notes

- FINISH: Finish is low VOC thermo-cure powdercoat paint. Specify three digit color suffix with "PT" finish options.
- HOUSING: Solid aluminum plate top and bottom end caps, extruded aluminum corner posts and laser-cut aluminum accent panel.
- MOUNTING: Fixture mounts to a 2 x 4 switch box.
- ETL listed to UL standards for wet locations.
- Fluorescent ballasts rated to - 22-degree F

1 Fixture Number

- DE-254 4"W x 21.3"H x 4" Ext.
- DE-256 4"W x 25.2"H x 4" Ext.
- DE-258 4"W x 31.2"H x 4" Ext.

2 Finish

- | | |
|--------------------------------|--------------------------------|
| Trim | Panel |
| Standard Painted Finishes (PT) | Standard Painted Finishes (PT) |
| | Raw Copper (CU) |

3 Lamping

Includes integral wet location rated 120-277v 1-100% dimming driver compatible with 0-10v controls. Over-current and short-circuit protected. All LEDs are 80+ CRI, 50,000 hr. L70. Wattage listed includes driver efficiency.

DE-254

| LED Options | Lumens | Wattage |
|-------------|---------------|---------|
| E11 | 818 (initial) | 11 |

DE-256

| LED Options | Lumens | Wattage |
|-------------|----------------|---------|
| E17 | 1226 (initial) | 17 |

DE-258

| LED Options | Lumens | Wattage |
|-------------|----------------|---------|
| E23 | 1636 (initial) | 23 |

4 LED Color Temp

- 27: 2700K
- 30: 3000K
- 35: 3500K
- 40: 4000K

5 LED Dimming

- D0: 0-10v


6 Voltage Options

- 120: 120 volt
- 277: 277 volt (Not available with incandescent lamp options)

7 Diffuser Options

- WH: Opal White Acrylic
- FX: Faux Alabaster Acrylic

8 Panel Options

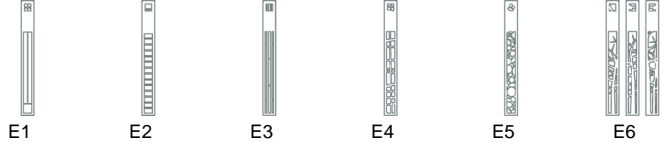

1

Fixture #

2

Trim
(Finish)

2

Panel
(Finish)

3

Lamping

4

Color Temp

5

Dimming

6

Voltage

7

Diffuser

8

Panel