



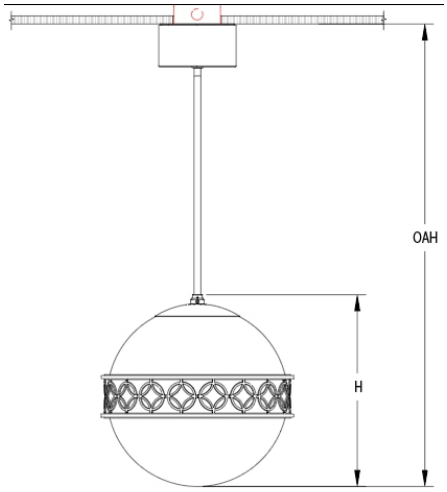

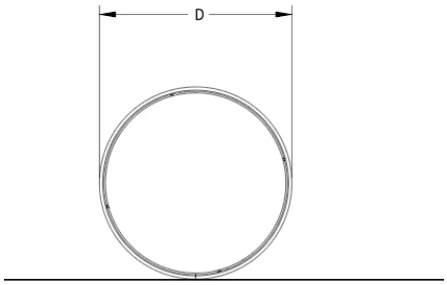

Notes

- OAH is standard unless specified.
- FINISH: Finish is low VOC thermo-cure powdercoat paint or clear lacquer. Specify three digit color suffix with "PT" finish options.
- HOUSING: Spun aluminum fitter and opal white glass shade.
- MOUNTING: Fixture supplied with canopy, 45-degree swivel ball and hanger for mounting to standard octagon junction box.
- ETL listed to UL standards for dry and damp locations.
- *Surge protection recommended for use with D1 (Triac/Leading Edge) dimming systems.

1 Fixture Number

DP-46-10	10"H	x	10" Dia.	52" Oah.
DP-46-12	12"H	x	12" Dia.	52" Oah.
DP-46-14	14"H	x	14" Dia.	54" Oah.
DP-46-16	16"H	x	16" Dia.	56" Oah.

2 Finish

Standard Painted Finishes (PT)

3 Lamping

LED option includes canopy-mounted 120-277v 1-100% dimming driver compatible with 0-10v, Triac, and ELV controls. Over-current and short-circuit protected. All LEDs are 80+ CRI, 50,000 hr. L70. Wattage listed includes driver efficiency.

DP-46-10

LED Options	Lumens	Wattage
P20 Uplight + Downlight	2383 (delivered)	20

Non-LED Lamps

1N60: (1) 60 watt incandescent

DP-46-12

LED Options	Lumens	Wattage
P39 Celeste	4019 delivered	39

Non-LED Lamps

1N60: (1) 60 watt incandescent

DP-46-14

LED Options	Lumens	Wattage
P39 Celeste	4019 delivered	39

Non-LED Lamps

1N60: (1) 60 watt incandescent

DP-46-16

LED Options	Lumens	Wattage
P39 Celeste	4019 delivered	39

Non-LED Lamps

1N60: (1) 60 watt incandescent

4 LED Color Temp

27: 2700K
30: 3000K
35: 3500K
40: 4000K

5 LED Dimming

D0: 0-10v
D1: Triac (Leading Edge)*
D2: ELV (Trailing Edge)


6 Voltage Options

120: 120 volt
277: 277 volt (Not available with incandescent lamp options)

7 Diffuser Options

WHG: Opal White Glass

8 Panel Options

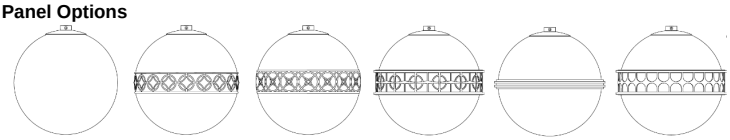

9 Fixture Options

REM: Remote driver box
DKC: Disk ceiling driver canopy

1	2	3	4	5	6	7	8	9
Fixture #	Finish (Finish)	Lamping	Color Temp	Dimming	Voltage	Diffuser	Panel	Fixture Option

©2018 Manning Lighting Inc. Sheboygan, WI 53083 Phone: 920-458-2184 Web: manningltg.com Email: info@manningltg.com Design modification rights reserved. Made in USA.