
Greene Pendant



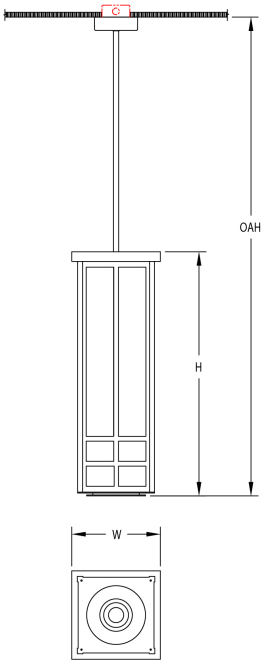

Notes

- OAH is standard unless specified.
- FINISH: Finish is low VOC thermo-cure powdercoat paint or clear lacquer. Specify three digit color suffix with "PT" finish options.
- HOUSING: Solid aluminum top and bottom end caps, extruded aluminum corner posts and laser-cut aluminum accent panels.
- MOUNTING: Fixture supplied with painted canopy, 45-degree swivel ball and hanger for mounting to standard octagon junction box.
- CIRCUITS: Dual-level circuiting for interior lamps/downlight standard.
- ETL listed to UL standards for dry and damp locations
- *Surge protection recommended for use with D1 (Triac/Leading Edge) dimming systems.

1 Fixture Number

LP-250	9"W x 23"H x 9"L 49" Oah.
LP-252	11.5"W x 31.5"H x 11.5"L 69" Oah.
LP-254	13.5W x 37.5"H x 13.5"L 88" Oah.

2 Finish

Panel	Trim
Brushed Solid Aluminum (BA)	Brushed Solid Aluminum (BA)
Standard Painted Finishes (PT)	Standard Painted Finishes (PT)
Faux Antique Brass (FAB)	Faux Antique Brass (FAB)

3 Lamping

LED options includes integral 120-277v 1-100% dimming driver compatible with 0-10v, Triac, and ELV controls. Over-current and short-circuit protected. All LEDs are 80+ CRI, 50,000 hr. L70. Wattage listed includes driver efficiency.

LP-250

LED Options	Lumens	Wattage
P27 Body only w/bottom lens (27W)	2730 (delivered)	27
P63 Body (27w) + Downlight (36w)	5471 (delivered)	63

Non-LED Lamps

1N200: 200 watt A-21 med. base

LP-252

LED Options	Lumens	Wattage
P40 Body only w/bottom lens (40w)	3796 (delivered)	40
P88 Body (40w) + Downlight (48w)	8128 (delivered)	88
U18 Optional Uplight (18w)	1613 (delivered)	18

Non-LED Lamps

8N100 / 1R300: (8) 100 watt incandescent & (1) 300 watt R40 med. base

LP-254

LED Options	Lumens	Wattage
P54 Body only w/bottom lens (54w)	5555 (delivered)	54
P109 Body (54w) + Downlight (55w)	11760 (delivered)	109
P150 Body (54w) + Downlight (96w)	14818 (delivered)	150
U44 Optional Uplight (44w)	4038 (delivered)	44

Non-LED Lamps

10N100 / 1R500: (10) 100 watt incandescent & (1) 500 watt R40 med. base

4 LED Color Temp

27: 2700K
30: 3000K
35: 3500K
40: 4000K

5 LED Dimming

D0: 0-10v
D1: Triac (Leading Edge)*
D2: ELV (Trailing Edge)

6 Downlight Optics Options

B60: 60-deg. beam reflector
B90: 90-deg. beam reflector
ECR: Black Egg Crate Louver (approx. 40-deg. beam)

7 Voltage Options

120: 120 volt
277: 277 volt (Not available with incandescent lamp options)

8 Diffuser Options

WH: White Acrylic
IV: Ivory acrylic
FX: Faux Alabaster Acrylic

1	2	2	3	4	5	6	7	8
Fixture #	Panel (Finish)	Trim (Finish)	Lamping	Color Temp	Dimming	Downlight Opti	Voltage	Diffuser

©2018 Manning Lighting Inc. Sheboygan, WI 53083 Phone: 920-458-2184 Web: manningltg.com Email: info@manningltg.com Design modification rights reserved. Made in USA.