

H.O. Wedge Sconce

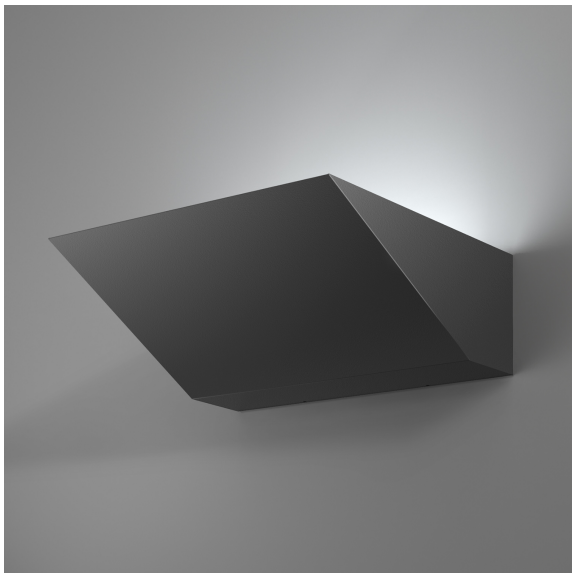

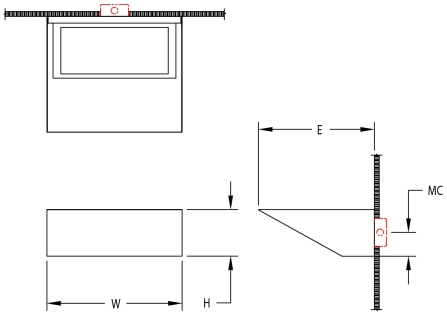

Notes

- FINISH: Finish is low VOC thermo-cure powdercoat paint. Specify three digit color suffix with "PT" finish options.
- HOUSING: Consists of an adjustable fabricated aluminum reflector housing and fabricated aluminum wall mounting plate.
- MOUNTING: Fixture mounts to a standard octagonal junction box.
- *Surge protection recommended for use with D1 (Triac/Leading Edge) dimming systems.

1 Fixture Number

HO-790	17.5"W x 6"H x 15.25" Ext.
HO-792	26"W x 6"H x 15.25" Ext.
HO-794	30"W x 6"H x 15.25" Ext.

2 Finish

Standard Painted Finishes (PT)

3 Lamping

LED option includes integral 120-277v 1-100% dimming drivers compatible with 0-10v, Triac, and ELV controls. Over-current and short-circuit protected. All LEDs are 80+ CRI, 50,000 hr. L70. Wattage listed includes driver efficiency.

HO-790

LED Options	Lumens	Wattage
S16	995 (delivered)	16

HO-792

LED Options	Lumens	Wattage
S32	3440 (initial)	32

HO-794

LED Options	Lumens	Wattage
S64	6880 (initial)	64

4 LED Color Temp

27: 2700K
30: 3000K
35: 3500K
40: 4000K

5 LED Dimming

D0: 0-10v
D1: Triac (Leading Edge)*
D2: ELV (Trailing Edge)

6 Voltage Options

120: 120 volt
277: 277 volt (Not available with incandescent lamp options)

1	2	3	4	5	6
Fixture #	Finish (Finish)	Lamping	Color Temp	Dimming	Voltage

©2018 Manning Lighting Inc. Sheboygan, WI 53083 Phone: 920-458-2184 Web: manningltg.com Email: info@manningltg.com Design modification rights reserved. Made in USA.