
Height Pendant (Disk)



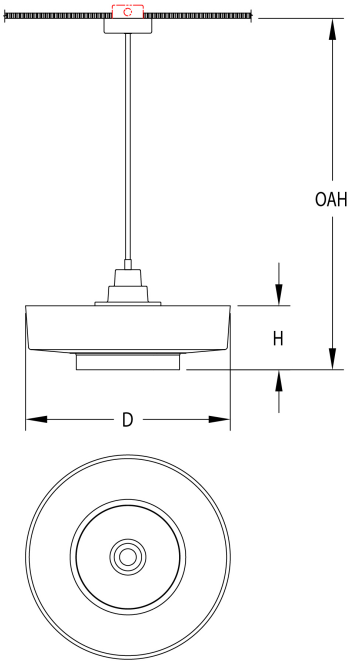

Notes

- FINISH: Finish is low VOC thermo-cure powdercoat paint. Specify three digit color suffix with "PT" finish options.
- HOUSING: Consists of a white thermoformed acrylic diffuser with spun aluminum downlight bezel assembly.
- MOUNTING: Fixture supplied with a painted canopy, 45-degree swivel ball and hanger for mounting to standard octagon junction box.
- CIRCUITS: Dual-level circuiting for interior lamps/downlight standard.
- *Surge protection recommended for use with D1 (Triac/Leading Edge) dimming systems.

1 Fixture Number

LP-219	11.25"H	x 17.25" Dia. 38" Oah.
LP-221	12.5"H	x 24" Dia. 51" Oah.
LP-223	12.5"H	x 30" Dia. 65" Oah.

2 Finish

Brushed Solid Aluminum (BA)

Standard Painted Finishes (PT)

3 Lamping

LED options includes integral 120-277v 1-100% dimming driver compatible with 0-10v, Triac, and ELV controls. Over-current and short-circuit protected. All LEDs are 80+ CRI, 50,000 hr. L70. Wattage listed includes driver efficiency.

LP-219

LED Options	Lumens	Wattage
B49 Uplight + Downlight	6009 (initial)	49

Non-LED Lamps

3N100 / 1QP120: (3) 100 watt incandescent & (1) 120 watt PAR 38 quartz halogen

LP-221

LED Options	Lumens	Wattage
B66 Uplight + Downlight	8080 (initial)	66

Non-LED Lamps

6N100 / 1R500: (6) 100 watt incandescent & (1) 500 watt R40 med. base

LP-223

LED Options	Lumens	Wattage
B95 Uplight + Downlight	5160 up/4984 down (delivered)	95

Non-LED Lamps

6N100 / 1R500: (6) 100 watt incandescent & (1) 500 watt R40 med. base

4 LED Color Temp

27: 2700K

30: 3000K

35: 3500K

40: 4000K

5 LED Dimming

D0: 0-10v

D1: Triac (Leading Edge)*

D2: ELV (Trailing Edge)

6 Downlight Optics Options

CON: Concentric Ring Louver (approx. 50-deg. beam)

ECR: Black Egg Crate Louver (approx. 40-deg. beam)

7 Voltage Options

120: 120 volt

277: 277 volt (Not available with incandescent lamp options)

8 Diffuser Options

WH: White Acrylic

1	2	3	4	5	6	7	8
Fixture #	Finish (Finish)	Lamping	Color Temp	Dimming	Downlight Opti	Voltage	Diffuser

©2018 Manning Lighting Inc. Sheboygan, WI 53083 Phone: 920-458-2184 Web: manningltg.com Email: info@manningltg.com Design modification rights reserved. Made in USA.