


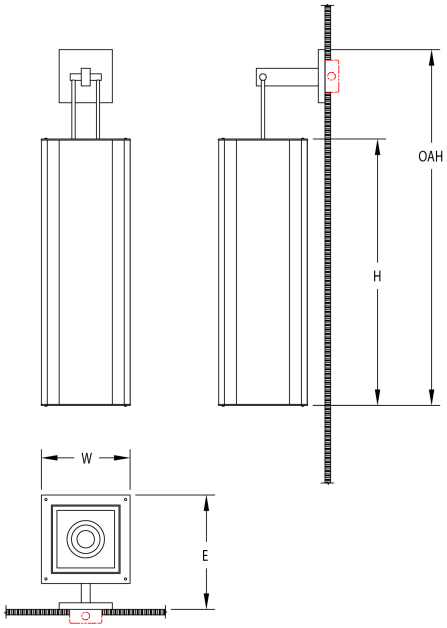

Notes

- OAH is standard unless specified.
- FINISH: PRIMARY FINISH = Canopy, support arms, corner extrusions, top and bottom plates. SECONDARY FINISH = Accent panels. Finish is low VOC thermo-cure powdercoat paint or clear lacquer. Specify three digit color suffix with "PT" finish options.
- HOUSING: Heavy gauge solid aluminum top and bottom frames with custom extruded aluminum corners. The side trim panels can be ordered with complementary color or finish.
- MOUNTING: Fixture is supplied with a universal mounting strap assembly that attaches to a standard octagonal junction box.
- *Surge protection recommended for use with D1 (Triac/Leading Edge) dimming systems.

1 **Fixture Number**

HB-381	8"W x 22"H x 8"L x 10" Ext.	30" Oah.
HB-382	10"W x 30"H x 10"L x 13" Ext.	39" Oah.
HB-384	12"W x 36"H x 12"L x 16" Ext.	46" Oah.

2 **Finish**

Primary Finish
- Brushed Solid Aluminum (BA)
- Standard Painted Finishes (PT)

Secondary Finish
- Brushed Solid Aluminum (BA)
- Standard Painted Finishes (PT)

3 **Lamping**

LED option includes integral 120-277v 1-100% dimming drivers compatible with 0-10v, Triac, and ELV controls. Over-current and short-circuit protected. All LEDs are 80+ CRI, 50,000 hr. L70. Wattage listed includes driver efficiency.

HB-381

LED Options	Lumens	Wattage
P27 Body only w/bottom lens (27W)	2730 (delivered)	27
P63 Body (27w) + Downlight (36w)	5471 (delivered)	63

Non-LED Lamps

1N150: (1) 150 watt incandescent

HB-382

LED Options	Lumens	Wattage
P40 Body only w/bottom lens (40w)	3796 (delivered)	40
P88 Body (40w) + Downlight (48w)	8128 (delivered)	88
U18 Optional Uplight (18w)	1613 (delivered)	18

Non-LED Lamps

8N60 / 1QP250: (8) 60 watt incandescent & (1) 250 watt PAR38 med. base

HB-384

LED Options	Lumens	Wattage
P54 Body only w/bottom lens (54w)	5555 (delivered)	54
P109 Body (54w) + Downlight (55w)	11760 (delivered)	109
P150 Body (54w) + Downlight (96w)	14818 (delivered)	150
U44 Optional Uplight (44w)	4038 (delivered)	44

Non-LED Lamps

10N60 / 1QP250: (10) 60 watt incandescent & (1) 250 watt PAR38 med. base

4 **LED Color Temp**
- 27: 2700K
- 30: 3000K
- 35: 3500K
- 40: 4000K

5 **LED Dimming**
- D0: 0-10v
- D1: Triac (Leading Edge)*
- D2: ELV (Trailing Edge)

6 **Downlight Optics Options**
- ECR: Black Egg Crate Louver (approx. 40-deg. beam)
- BGL: Baffle & glass lens (for QT & MHT lamps only)
- LED: Reflector & bottom cover plate (for LED lamp options only)

7 **Voltage Options**
- 120: 120 volt
- 277: 277 volt (Not available with incandescent lamp options)

8 **Diffuser Options**
- WH: White Acrylic
- CD: Ambia configured diffuser (specify option)

1	2	2	3	4	5	6	7	8
Fixture #	Primary Finish (Finish)	Secondary Fini (Finish)	Lamping	Color Temp	Dimming	Downlight Opti	Voltage	Diffuser

©2018 Manning Lighting Inc. Sheboygan, WI 53083 Phone: 920-458-2184 Web: manningltg.com Email: info@manningltg.com Design modification rights reserved. Made in USA.