


Notes

- ETL listed to UL standards for dry and damp locations
- White bottom acrylic lens standard.
- OAH is standard unless specified.
- FINISH: PRIMARY FINISH = Canopy, corner extrusions, top and bottom plates. SECONDARY FINISH = Accent panels. Finish is low VOC thermo-cure powdercoat paint or clear lacquer. Specify three digit color suffix with "PT" finish options.
- HOUSING: Heavy gauge solid aluminum top and bottom frames with custom extruded aluminum corners. The side trim panels can be ordered with complementary color or finish. The fabricated aluminum wire body is coated with a reflective white enamel finish.
- MOUNTING: Fixture is supplied with a universal mounting strap assembly that attaches to a standard octagonal junction box.
- *Surge protection recommended for use with D1 (Triac/Leading Edge) dimming systems.

Images Square Pendant



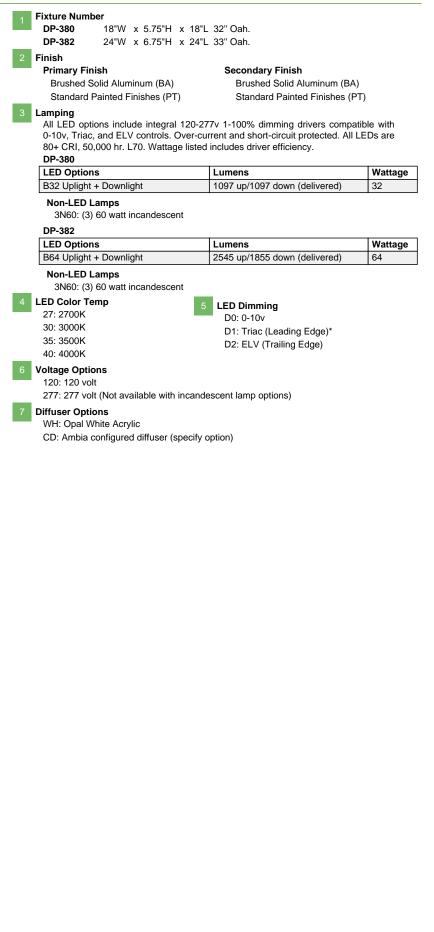

©2018 Manning Lighting Inc. Sheboygan, WI 53083 Phone: 920-458-2184 Web: manningltg.com Email: info@manningltg.com Design modification rights reserved. Made in USA.