
Java Pendant



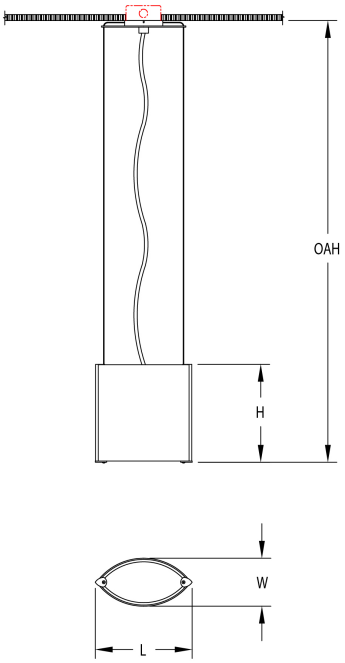

Notes

- *Surge protection recommended for use with D1 (Triac/Leading Edge) dimming systems.
- OAH is standard unless specified.
- FINISH: Finish is low VOC thermo-cure powdercoat paint. Specify three digit color suffix with "PT" finish options.
- HOUSING: Solid aluminum canopy plate, extruded aluminum side rail, and machined accents can be ordered with either a painted or brushed aluminum finish.
- MOUNTING: Fixture is supplied with a universal mounting strap assembly that attaches to a standard octagonal junction box.
- White bottom acrylic lens standard.
- ETL listed to UL standards for dry and damp locations

1 Fixture Number

LP-370	6"W	x	10"H	x	10"L 36" Oah.
LP-372	6"W	x	24"H	x	10"L 50" Oah.

2 Finish

Brushed Solid Aluminum (BA)
Standard Painted Finishes (PT)

3 Lamping

LED options includes integral 120-277v 1-100% dimming driver compatible with 0-10v, Triac, and ELV controls. Over-current and short-circuit protected. All LEDs are 80+ CRI, 50,000 hr. L70. Wattage listed includes driver efficiency.

LP-370

LED Options	Lumens	Wattage
P8	860 (initial)	8

Non-LED Lamps

1N60: (1) 60 watt incandescent

LP-372

LED Options	Lumens	Wattage
P27 Body only w/bottom lens (27W)	2730 (delivered)	27
P63 Body (27w) + Downlight (36w)	5471 (delivered)	63

Non-LED Lamps

3NT40: (3) 40 watt T-10 incandescent

4 LED Color Temp

27: 2700K
30: 3000K
35: 3500K
40: 4000K

5 LED Dimming

D0: 0-10v
D1: Triac (Leading Edge)*
D2: ELV (Trailing Edge)

6 Voltage Options

120: 120 volt
277: 277 volt (Not available with incandescent lamp options)

7 Diffuser Options

WH: White Acrylic
CD: Ambia configured diffuser (specify option)

1	2	3	4	5	6	7
Fixture #	Finish (Finish)	Lamping	Color Temp	Dimming	Voltage	Diffuser

©2018 Manning Lighting Inc. Sheboygan, WI 53083 Phone: 920-458-2184 Web: manningltg.com Email: info@manningltg.com Design modification rights reserved. Made in USA.