
Java Sconce



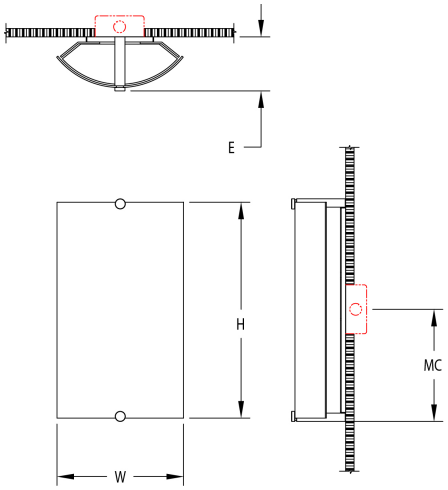

Notes

- FINISH: Finish is low VOC thermo-cure powdercoat paint or clear lacquer. Specify three digit color suffix with "PT" finish options.
- HOUSING: Solid machined aluminum support arms can be ordered with either a painted or brushed aluminum finish, white backplate standard.
- MOUNTING: Fixture is supplied with a universal mounting strap assembly that attaches to a standard octagonal junction box.
- White bottom acrylic lens standard.
- ETL listed to UL standards for dry and damp locations
- *Surge protection recommended for use with D1 (Triac/Leading Edge) dimming systems.

1 Fixture Number

LB-370	9.5"W x 10"H x 4" Ext.	
LB-372	9.5"W x 16"H x 4" Ext.	
LB-374	9.5"W x 24"H x 4" Ext.	

2 Finish

Brushed Solid Aluminum (BA)
Standard Painted Finishes (PT)

3 Lamping

LED option includes integral 120-277v 1-100% dimming drivers compatible with 0-10v, Triac, and ELV controls. Over-current and short-circuit protected. All LEDs are 80+ CRI, 50,000 hr. L70. Wattage listed includes driver efficiency.

LB-370

LED Options	Lumens	Wattage
S7	612 (delivered)	7

Non-LED Lamps
1NT40: (1) 40 watt T-10 incandescent

LB-372

LED Options	Lumens	Wattage
S7	612 (delivered)	7

Non-LED Lamps
2NT40: (2) 40 watt T-10 incandescent

LB-374

LED Options	Lumens	Wattage
S16	995 (delivered)	16

Non-LED Lamps
3NT40: (3) 40 watt T-10 incandescent

4 LED Color Temp

27: 2700K
30: 3000K
35: 3500K
40: 4000K

5 LED Dimming

D0: 0-10v
D1: Triac (Leading Edge)*
D2: ELV (Trailing Edge)

6 Voltage Options

120: 120 volt
277: 277 volt (Not available with incandescent lamp options)

7 Diffuser Options

WH: White Acrylic
CD: Ambia configured diffuser (specify option)

1	2	3	4	5	6	7
Fixture #	Finish (Finish)	Lamping	Color Temp	Dimming	Voltage	Diffuser

©2018 Manning Lighting Inc. Sheboygan, WI 53083 Phone: 920-458-2184 Web: manningltg.com Email: info@manningltg.com Design modification rights reserved. Made in USA.