
Kiosk Round Pendant



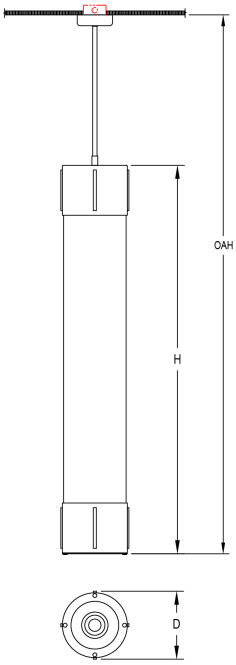

Notes

- FINISH: Finish is low VOC thermo-cure powdercoat paint or clear lacquer. Specify three digit color suffix with "PT" finish options.
- OAH is standard unless specified.
- HOUSING: White 1/8" thick extruded acrylic cylinder with heavy gauge aluminum end caps and machined aluminum 1/4" x 1/2" bar details.
- MOUNTING: Fixture supplied with canopy, 45-degree swivel ball and hanger for mounting to standard octagon junction box.
  LP-554: Fixture requires structural support such as 2x4 blocking or 3/8" IP stud extending below finished ceiling.
- CIRCUITS: Dual circuiting for interior lamps and downlight standard.
- ETL listed to UL standards for dry and damp locations.
- *Surge protection recommended for use with D1 (Triac/Leading Edge) dimming systems.

1 **Fixture Number**

LP-550	50.25"H x 10.25" Dia. 76" Oah.
LP-552	62.25"H x 10.25" Dia. 88" Oah.
LP-554	109.25"H x 10.25" Dia. 135" Oah.

2 **Finish**

Housing, Stem & Canopy

Standard Painted Finishes (PT)

Brushed Solid Aluminum (BA)

3 **Lamping**

LED options includes integral 120-277v 1-100% dimming driver compatible with 0-10v, Triac, and ELV controls. Over-current and short-circuit protected. All LEDs are 80+ CRI, 50,000 hr. L70. Wattage listed includes driver efficiency.

LP-550

LED downlight is COB array with 2,168 delivered lumens @ 3500K.

LED Options	Lumens	Wattage
P86 Body Only (86w)	9065 (delivered)	86
P110 Body (86w) + Downlight (23w)	11233 (delivered)	109

LP-552

LED downlight is COB array with 2,168 delivered lumens @ 3500K.

LED Options	Lumens	Wattage
P115 Body Only (115w)	12088 (delivered)	115
P138 Body (115w) + Downlight (23w)	14256 (delivered)	138

LP-554

LED downlight is COB array with 2,168 delivered lumens @ 3500K.

LED Options	Lumens	Wattage
P230 Body Only (230w)	24177 (delivered)	230
P253 Body (230w) + Downlight (23w)	26345 (delivered)	253

4 **LED Color Temp**

27: 2700K

30: 3000K

35: 3500K

40: 4000K

5 **LED Dimming**

D0: 0-10v

D1: Triac (Leading Edge)*

D2: ELV (Trailing Edge)

6 **Downlight Optics Options**

B50: 50-deg. beam reflector

7 **Voltage Options**

120: 120 volt

277: 277 volt (Not available with incandescent lamp options)

8 **Diffuser Options**

WH: White Acrylic

1	2	3	4	5	6	7	8
Fixture #	Housing, Stem (Finish)	Lamping	Color Temp	Dimming	Downlight Opti	Voltage	Diffuser

©2018 Manning Lighting Inc. Sheboygan, WI 53083 Phone: 920-458-2184 Web: manningltg.com Email: info@manningltg.com Design modification rights reserved. Made in USA.