
Kiosk Round Sconce



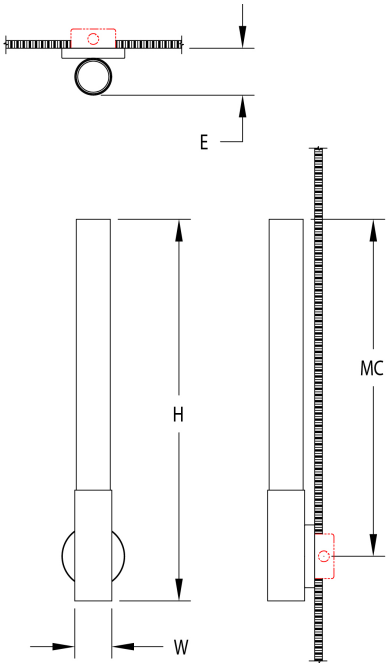

Notes

- FINISH: Finish is low VOC thermo-cure powdercoat paint or clear lacquer. Specify three digit color suffix with "PT" finish options.
- HOUSING: Machined aluminum tube with spun aluminuum mounting plate.
- MOUNTING: Fixture mounts to standard octagonal electrical box. LB-552: Mounting plate has auxiliary mounting holes for attachment to structural blocking to support fixture (required).
- ETL listed to UL standards for dry and damp locations.
- *Surge protection recommended for use with D1 (Triac/Leading Edge) dimming systems.

1 Fixture Number

LB-550 2.75"W x 31"H x 3.75" Ext.

LB-552 4"W x 44"H x 6.75" Ext.

2 Finish

Housing

Standard Painted Finishes (PT)

Brushed Solid Aluminum (BA)

3 Lamping

LED option includes integral 120-277v 1-100% dimming drivers compatible with 0-10v, Triac, and ELV controls. Over-current and short-circuit protected. All LEDs are 80+ CRI, 50,000 hr. L70. Wattage listed includes driver efficiency.

LB-550

LED Options	Lumens	Wattage
S9	1308 (initial)	9

LB-552

LED Options	Lumens	Wattage
S23	2307 (initial)	23

4 LED Color Temp

27: 2700K

30: 3000K

35: 3500K

40: 4000K

5 LED Dimming

D0: 0-10v

D1: Triac (Leading Edge)*

D2: ELV (Trailing Edge)

6 Voltage Options

120: 120 volt

277: 277 volt (Not available with incandescent lamp options)

7 Diffuser Options

WH: White Acrylic

1 Fixture # | 2 Housing (Finish) | 3 Lamping | 4 Color Temp | 5 Dimming | 6 Voltage | 7 Diffuser

©2018 Manning Lighting Inc. Sheboygan, WI 53083 Phone: 920-458-2184 Web: manningltg.com Email: info@manningltg.com Design modification rights reserved. Made in USA.