
LED retrofit for Spatialite



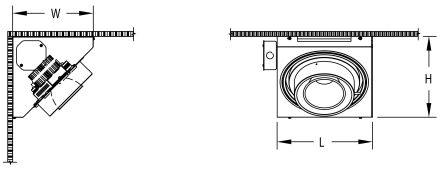

Notes

- LED retrofit consists of LED module with integral driver, heat sink, and optical reflector for replacement of Par64, Par56, or Par46 lamps in existing Manning non-recessed GC, GS, and GCQ series fixtures.
- 3000K CCT and 30-degree beam reflector are standard.
- Each retrofit wire terminates in existing junction box on multi-lamp housings.
- Retrofit assembly snaps into lamp spring clips in existing fixture.
- ETL listed to UL standards for new or retrofit fixtures.
- *Surge protection recommended for use with D1 (Triac/Leading Edge) dimming systems.

1 Fixture Number

GCR-046 8"W x 8"H x 9.5"L

GCR-064 10"W x 10"H x 12"L

2 Finish

(NONE)

3 Lamping

LED option includes integral 120-277v 1-100% dimming drivers compatible with 0-10v, Triac, and ELV controls. Over-current and short-circuit protected. All LEDs are 80+ CRI, 50,000 hr. L70. Wattage listed includes driver efficiency.

GCR-046

LED Options	Lumens	Wattage
G35R LED replacement Par46 or Par38	3657 (delivered)	35

GCR-064

LED Options	Lumens	Wattage
G56R LED replacement Par56 or Par64	5970 (delivered)	56

4 LED Color Temp

27: 2700K
30: 3000K
35: 3500K
40: 4000K

5 LED Dimming

D0: 0-10v
D1: Triac (Leading Edge)*
D2: ELV (Trailing Edge)

6 Downlight Optics Options

B11: 11-deg. beam reflector
B30: 30-deg. beam reflector
B60: 60-deg. beam reflector

7 Voltage Options

120: 120 volt
277: 277 volt (Not available with incandescent lamp options)

1	2	3	4	5	6	7
Fixture #	Finish (Finish)	Lamping	Color Temp	Dimming	Downlight Opti	Voltage

©2018 Manning Lighting Inc. Sheboygan, WI 53083 Phone: 920-458-2184 Web: manningltg.com Email: info@manningltg.com Design modification rights reserved. Made in USA.