

**1 Fixture Number**  
**CC-164** 12.5"H x 6" Dia.

**2 Finish**  
**Housing & Trim**  
 Brushed Solid Aluminum (BA)  
 Standard Painted Finishes (PT)

**3 Lamping**  
 All LED options include integral 120-277v 1-100% dimming drivers compatible with 0-10v, Triac, and ELV controls. Over-current and short-circuit protected. All LEDs are 80+ CRI, 50,000 hr. L70. Wattage listed includes driver efficiency.

LED Options	Lumens	Wattage
C44	4805 (initial)	44

**Non-LED Lamps**  
 1N100: (1) 100 watt incandescent


**4 LED Color Temp**  
 27: 2700K  
 30: 3000K  
 35: 3500K  
 40: 4000K

**5 LED Dimming**  
 D0: 0-10v  
 D1: Triac (Leading Edge)\*  
 D2: ELV (Trailing Edge)

**6 Downlight Optics Options**  
 B60: 60-deg. beam reflector  
 B90: 90-deg. beam reflector  
 CON: Concentric Ring Louver (approx. 50-deg. beam)

**7 Voltage Options**  
 120: 120 volt  
 277: 277 volt (Not available with incandescent lamp options)

**8 Panel Options**

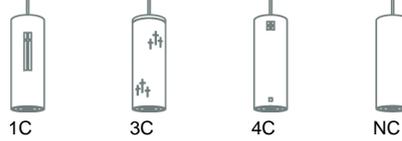

- 1**  
Fixture #
- 2**  
Housing & Trim  
(Finish)
- 3**  
Lamping
- 4**  
Color Temp
- 5**  
Dimming
- 6**  
Downlight Opti
- 7**  
Voltage
- 8**  
Panel