

1 Fixture Number

CP-221 12.5"H x 24" Dia. 45" Oah.
CP-222 12.5"H x 36" Dia. 58" Oah.

2 Finish

Housing & Trim
 Brushed Solid Aluminum (BA)
 Standard Painted Finishes (PT)

3 Lamping

All LED options include integral 120-277v 1-100% dimming drivers compatible with 0-10v, Triac, and ELV controls. All LEDs are 80+ CRI, 50,000 hr. L70. Wattage listed includes driver efficiency. Two-circuit wiring standard.

CP-221

LED Options	Lumens	Wattage
CH140 (4) LED arrays + downlights	15864 (initial)	140

Non-LED Lamps

4N60 / 4R300: (4) 60 watt incandescent & (4) 300 watt R40 med. base

CP-222

LED Options	Lumens	Wattage
CH210 (6) LED arrays + downlights	25334 (initial)	210

Non-LED Lamps

6N60 / 6R300: (6) 60 watt incandescent & (6) 300 watt R40 med. base

4 LED Color Temp

27: 2700K
 30: 3000K
 35: 3500K
 40: 4000K

5 LED Dimming

D0: 0-10v
 D1: Triac (Leading Edge)*
 D2: ELV (Trailing Edge)


6 Downlight Optics Options

B60: 60-deg. beam reflector
 B90: 90-deg. beam reflector
 CON: Concentric Ring Louver (approx. 50-deg. beam)

7 Voltage Options

120: 120 volt
 277: 277 volt (Not available with incandescent lamp options)

8 Panel Options

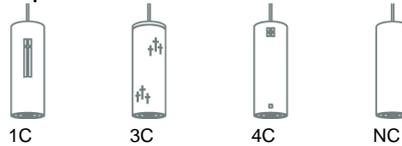

1

Fixture #

2

Housing & Trim
(Finish)

3

Lamping

4

Color Temp

5

Dimming

6

Downlight Opti

7

Voltage

8

Panel