

## Notes

- CP-221 = 4 arms. CP-222 = 6 arms.
- OAH is standard unless specified.
- FINISH: Finish is low VOC thermo-cure powdercoat paint. Specify three digit color suffix with "PT" finish options.
- HOUSING: Solid spun aluminum cylinder with white acrylic diffuser panels behind perforated design (if selected). Cast aluminum center hub and extruded aluminum arms.
- MOUNTING: Fixture supplied with painted canopy, 45-degree swivel ball and hanger for mounting to standard octagon junction box.
- ETL listed to UL standards for dry and damp locations. B268
- \*Surge protection recommended for use with D1 (Triac/Leading Edge) dimming systems.

### 1 Fixture Number

- CP-221** 12.5"H x 24" Dia. 45" Oah.  
**CP-222** 12.5"H x 36" Dia. 58" Oah.

### 2 Finish

- Housing & Trim**  
 Brushed Solid Aluminum (BA)  
 Standard Painted Finishes (PT)

### 3 Lamping

All LED options include integral 120-277v 1-100% dimming drivers compatible with 0-10v, Triac, and ELV controls. All LEDs are 80+ CRI, 50,000 hr. L70. Wattage listed includes driver efficiency. Two-circuit wiring standard.

#### CP-221

LED Options	Lumens	Wattage
CH140 (4) LED arrays + downlights	15864 (initial)	140

#### Non-LED Lamps

4N60 / 4R300: (4) 60 watt incandescent & (4) 300 watt R40 med. base

#### CP-222

LED Options	Lumens	Wattage
CH210 (6) LED arrays + downlights	25334 (initial)	210

#### Non-LED Lamps

6N60 / 6R300: (6) 60 watt incandescent & (6) 300 watt R40 med. base

### 4 LED Color Temp

- 27: 2700K  
 30: 3000K  
 35: 3500K  
 40: 4000K

### 5 LED Dimming

- D0: 0-10v  
 D1: Triac (Leading Edge)\*  
 D2: ELV (Trailing Edge)


### 6 Downlight Optics Options

- B60: 60-deg. beam reflector  
 B90: 90-deg. beam reflector  
 CON: Concentric Ring Louver (approx. 50-deg. beam)

### 7 Voltage Options

- 120: 120 volt  
 277: 277 volt (Not available with incandescent lamp options)

### 8 Panel Options

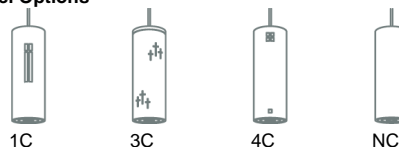

1	2	3	4	5	6	7	8
Fixture #	Housing & Trim (Finish)	Lamping	Color Temp	Dimming	Downlight Opti	Voltage	Panel