
Meddle Chandelier



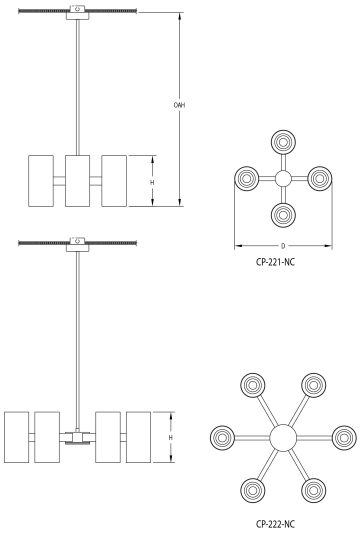

Notes

- CP-221 = 4 arms. CP-222 = 6 arms.
- OAH is standard unless specified.
- FINISH: Finish is low VOC thermo-cure powdercoat paint. Specify three digit color suffix with "PT" finish options.
- HOUSING: Solid spun aluminum cylinder with white acrylic diffuser panels behind perforated design (if selected). Cast aluminum center hub and extruded aluminum arms.
- MOUNTING: Fixture supplied with painted canopy, 45-degree swivel ball and hanger for mounting to standard octagon junction box.
- ETL listed to UL standards for dry and damp locations.B268
- *Surge protection recommended for use with D1 (Triac/Leading Edge) dimming systems.

1 Fixture Number

CP-221 12.5"H x 24" Dia. 45" Oah.
CP-222 12.5"H x 36" Dia. 58" Oah.

2 Finish

Housing & Trim

Brushed Solid Aluminum (BA)
Standard Painted Finishes (PT)

3 Lamping

All LED options include integral 120-277v 1-100% dimming drivers compatible with 0-10v, Triac, and ELV controls. All LEDs are 80+ CRI, 50,000 hr. L70. Wattage listed includes driver efficiency. Two-circuit wiring standard.

CP-221

LED Options	Lumens	Wattage
CH140 (4) LED arrays + downlights	15864 (initial)	140

Non-LED Lamps

4N60 / 4R300: (4) 60 watt incandescent & (4) 300 watt R40 med. base

CP-222

LED Options	Lumens	Wattage
CH210 (6) LED arrays + downlights	25334 (initial)	210

Non-LED Lamps

6N60 / 6R300: (6) 60 watt incandescent & (6) 300 watt R40 med. base

4 LED Color Temp

27: 2700K
30: 3000K
35: 3500K
40: 4000K

5 LED Dimming

D0: 0-10v
D1: Triac (Leading Edge)*
D2: ELV (Trailing Edge)


6 Downlight Optics Options

B60: 60-deg. beam reflector
B90: 90-deg. beam reflector
CON: Concentric Ring Louver (approx. 50-deg. beam)

7 Voltage Options

120: 120 volt
277: 277 volt (Not available with incandescent lamp options)

8 Panel Options

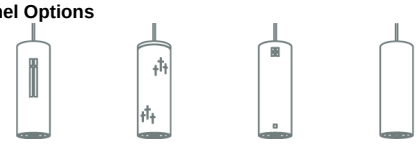

1 Fixture # | 2 Housing & Trim (Finish) | 3 Lamping | 4 Color Temp | 5 Dimming | 6 Downlight Opti | 7 Voltage | 8 Panel

©2018 Manning Lighting Inc. Sheboygan, WI 53083 Phone: 920-458-2184 Web: manningltg.com Email: info@manningltg.com Design modification rights reserved. Made in USA.