
Meddle Pendant



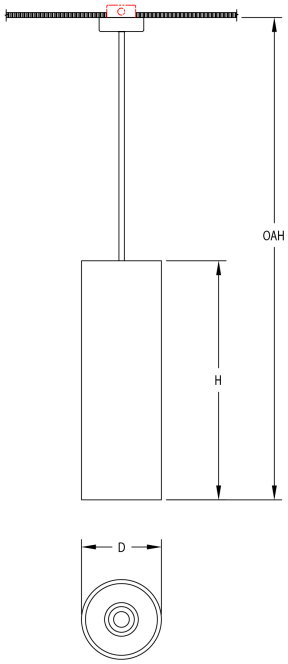

Notes

- OAH is standard unless specified.
- FINISH: Finish is low VOC thermo-cure powdercoat paint or clear lacquer. Specify three digit color suffix with "PT" finish options.
- HOUSING: Solid spun aluminum cylinder with white acrylic diffuser panels behind perforated design (if selected).
- MOUNTING: Fixture supplied with painted canopy, 45-degree swivel ball and hanger for mounting to standard octagon junction box.
- CIRCUITS: Dual-level circuiting for interior lamps/downlight standard.
- ETL listed to UL standards for dry and damp locations
- *Surge protection recommended for use with D1 (Triac/Leading Edge) dimming systems.

1 Fixture Number

LP-196	22"H x 8" Dia.	48" Oah.
LP-197	30"H x 10" Dia.	68" Oah.
LP-198	36"H x 12" Dia.	86" Oah.

2 Finish

Housing & Trim

Brushed Solid Aluminum (BA)
Standard Painted Finishes (PT)

3 Lamping

LED options includes integral 120-277v 1-100% dimming driver compatible with 0-10v, Triac, and ELV controls. Over-current and short-circuit protected. All LEDs are 80+ CRI, 50,000 hr. L70. Wattage listed includes driver efficiency.

LP-196

LED Options	Lumens	Wattage
P50 Body (14w) + Downlight (36w)	5881 (initial)	50

Non-LED Lamps

1N200: 200 watt A-21 med. base

LP-197

LED Options	Lumens	Wattage
P62 Body (14w) + Downlight (48w)	6920 (initial)	62
U18 Optional Uplight (18w)	1613 (delivered)	18

Non-LED Lamps

2N100 / 1R300: (2) 100 watt incandescent & (1) 300 watt R40 med. base

LP-198

LED Options	Lumens	Wattage
P70 Body (14w) + Downlight (55w)	8600 initial	70
U44 Optional Uplight (44w)	4038 (delivered)	44

Non-LED Lamps

2N100 / 1R500: (2) 100 watt incandescent & (1) 500 watt R40 med. base

4 LED Color Temp

27: 2700K
30: 3000K
35: 3500K
40: 4000K

5 LED Dimming

D0: 0-10v
D1: Triac (Leading Edge)*
D2: ELV (Trailing Edge)


6 Downlight Optics Options

B60: 60-deg. beam reflector
B90: 90-deg. beam reflector
CON: Concentric Ring Louver (approx. 50-deg. beam)

7 Voltage Options

120: 120 volt
277: 277 volt (Not available with incandescent lamp options)

8 Panel Options



1	2	3	4	5	6	7	8
Fixture #	Housing & Trim (Finish)	Lamping	Color Temp	Dimming	Downlight Opti	Voltage	Panel

©2018 Manning Lighting Inc. Sheboygan, WI 53083 Phone: 920-458-2184 Web: manningltg.com Email: info@manningltg.com Design modification rights reserved. Made in USA.