

1 Fixture Number
DS-710 12"W x 7"H x 4" Ext.

2 Finish
Housing & Trim
 Brushed Solid Aluminum (BA)
 Standard Painted Finishes (PT)

3 Lamping
 LED options includes integral 120-277v 1-100% dimming driver compatible with 0-10v, Triac, and ELV controls. Over-current and short-circuit protected. All LEDs are 80+ CRI, 50,000 hr. L70. Wattage listed includes driver efficiency.

DS-710

LED Options	Lumens	Wattage
S8	1193 (initial)	8


Non-LED Lamps
 1N60: (1) 60 watt incandescent

4 LED Color Temp
 27: 2700K
 30: 3000K
 35: 3500K
 40: 4000K

5 LED Dimming
 D0: 0-10v
 D1: Triac (Leading Edge)*
 D2: ELV (Trailing Edge)

6 Voltage Options
 120: 120 volt
 277: 277 volt (Not available with incandescent lamp options)

7 Panel Options

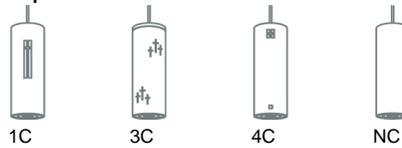

8 Fixture Options
 BL: Bottom Lens (included with LED options)

