

1 Fixture Number

- LP-270** 13.25"W x 26.75"H x 13.25"L 52" Oah.
- LP-272** 16.25"W x 33.25"H x 16.25"L 71" Oah.
- LP-274** 19.25"W x 39"H x 19.25"L 89" Oah.

2 Finish

- | | |
|--------------------------------|--------------------------------|
| Trim | Panels |
| Standard Painted Finishes (PT) | Brushed Solid Aluminum (BA) |
| | Standard Painted Finishes (PT) |
| | Wood Veneer (WV) |

3 Lamping

LED options includes integral 120-277v 1-100% dimming driver compatible with 0-10v, Triac, and ELV controls. Over-current and short-circuit protected. All LEDs are 80+ CRI, 50,000 hr. L70. Wattage listed includes driver efficiency.

LP-270

LED Options	Lumens	Wattage
P27 Body only w/bottom lens (27W)	2730 (delivered)	27
P63 Body (27w) + Downlight (36w)	5471 (delivered)	63

Non-LED Lamps

1N200: 200 watt A-21 med. base

LP-272

LED Options	Lumens	Wattage
P40 Body only w/bottom lens (40w)	3796 (delivered)	40
P88 Body (40w) + Downlight (48w)	8128 (delivered)	88

Non-LED Lamps

8N100 / 1R300: (8) 100 watt incandescent & (1) 300 watt R40 med. base

LP-274

LED Options	Lumens	Wattage
P54 Body only w/bottom lens (54w)	5555 (delivered)	54
P109 Body (54w) + Downlight (55w)	11760 (delivered)	109
P150 Body (54w) + Downlight (96w)	14818 (delivered)	150

Non-LED Lamps

10N100 / 1R500: (10) 100 watt incandescent & (1) 500 watt R40 med. base

4 LED Color Temp

- 27: 2700K
- 30: 3000K
- 35: 3500K
- 40: 4000K

5 LED Dimming

- D0: 0-10v
- D1: Triac (Leading Edge)*
- D2: ELV (Trailing Edge)

6 Downlight Optics Options

- B60: 60-deg. beam reflector
- B90: 90-deg. beam reflector
- ECR: Black Egg Crate Louver (approx. 40-deg. beam)


7 Voltage Options

- 120: 120 volt
- 277: 277 volt (Not available with incandescent lamp options)


8 Diffuser Options

- WH: White Acrylic

9 Panel Options

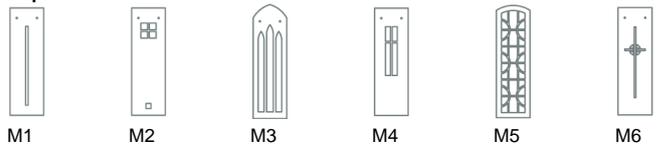

10 Stem Options

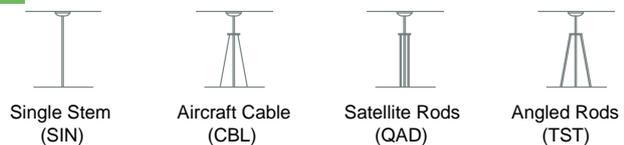

1

2

2

3

4

5

6

7

8

9

10

Fixture # Trim (Finish) Panels (Finish) Lamping Color Temp Dimming Downlight Opti Voltage Diffuser Panel Stem