

Notes

- OAH is standard unless specified.
- FINISH: Finish is low VOC thermo-cure powdercoat paint. Specify three digit color suffix with "PT" finish options.
- HOUSING: Consists of spun aluminum or brass rings trimmed with cast aluminum or brass band, acrylic bell diffusers and choice of stem kit.
- MOUNTING:
 - CP-950 & 952: Fixture specified with brushed or painted finish supplied with swivel hanger for mounting to standard octagon junction box. Fixture specified with brass material supplied with swivel hanger requiring attachment to structure using a ceiling fan rated electrical box.
 - CP-951 & CP-953: Fixture supplied with a painted canopy, 60-degree swivel ball and hanger. Structural support is required for this heavy fixture. 2 x 4 blocking or 1/2" IP stud extending 1/2" below finished ceiling through center of octagonal junction box is required.
- ETL listed to UL standards for dry and damp locations
- *Surge protection recommended for use with D1 (Triac/Leading Edge) dimming systems.

1 Fixture Number

| | |
|---------------|------------------------------|
| CP-950 | 12"H x 72.5" Dia. 34" Oah. |
| CP-951 | 12"H x 72.5" Dia. 34" Oah. |
| CP-952 | 13.5"H x 84.5" Dia. 46" Oah. |
| CP-953 | 13.5"H x 84.5" Dia. 46" Oah. |

2 Finish

Brushed Solid Aluminum (BA)
 Standard Painted Finishes (PT)
 Polished Brass (PB)
 Solid Antique Brass (SAB)
 Faux Antique Brass (FAB)

Cast Band Design

Egg & Dart Cast Trim (EGD)
 Greek Key Cast Trim (GRK)
 Rope Cast Trim (ROP)

3 Lamping

All LED options include integral 120-277v 1-100% dimming drivers compatible with 0-10v, Triac, and ELV controls. Over-current and short-circuit protected. All LEDs are 80+ CRI, 50,000 hr. L70. Wattage listed includes driver efficiency.

CP-950

| LED Options | Lumens | Wattage |
|----------------------------------|-------------------------------------|---------|
| CH94R Two Bowls - Up & Downlight | 2545 up/927 dn per bowl (delivered) | 94 |

Non-LED Lamps

6N100: (6) 100 watt incandescent

CP-951

| LED Options | Lumens | Wattage |
|------------------------------------|-------------------------------------|---------|
| CH188R Four Bowls - Up & Downlight | 2545 up/927 dn per bowl (delivered) | 188 |

Non-LED Lamps

12N100: (12) 100 watt incandescent

CP-952

| LED Options | Lumens | Wattage |
|-----------------------------------|--------------------------------------|---------|
| CH192R Two Bowls - Up & Downlight | 5091 up/1855 dn per bowl (delivered) | 192 |

Non-LED Lamps

8N100: (8) 100 watt incandescent

CP-953

| LED Options | Lumens | Wattage |
|------------------------------------|--------------------------------------|---------|
| CH384R Four Bowls - Up & Downlight | 5091 up/1855 dn per bowl (delivered) | 384 |

Non-LED Lamps

16N100: (16) 100 watt incandescent

4 LED Color Temp

27: 2700K
 30: 3000K
 35: 3500K
 40: 4000K

5 LED Dimming

D0: 0-10v
 D1: Triac (Leading Edge)*
 D2: ELV (Trailing Edge)


6 Voltage Options

120: 120 volt
 277: 277 volt (Not available with incandescent lamp options)

7 Diffuser Options

WH: White Acrylic
 FX: Faux Alabaster Acrylic

8 Stem Options

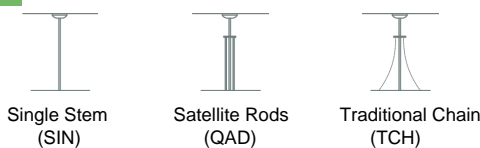

1

Fixture #

2

Finish
(Finish)

2

Cast Band Desi
(Finish)

3

Lamping

4

Color Temp

5

Dimming

6

Voltage

7

Diffuser

8

Stem