

1 Fixture Number

- CP-950** 12"H x 72.5" Dia. 34" Oah.
- CP-951** 12"H x 72.5" Dia. 34" Oah.
- CP-952** 13.5"H x 84.5" Dia. 46" Oah.
- CP-953** 13.5"H x 84.5" Dia. 46" Oah.

2 Finish

- Brushed Solid Aluminum (BA)
- Standard Painted Finishes (PT)
- Polished Brass (PB)
- Solid Antique Brass (SAB)
- Faux Antique Brass (FAB)

Cast Band Design

- Egg & Dart Cast Trim (EGD)
- Greek Key Cast Trim (GRK)
- Rope Cast Trim (ROP)

3 Lamping

All LED options include integral 120-277v 1-100% dimming drivers compatible with 0-10v, Triac, and ELV controls. Over-current and short-circuit protected. All LEDs are 80+ CRI, 50,000 hr. L70. Wattage listed includes driver efficiency.

CP-950

LED Options	Lumens	Wattage
CH94R Two Bowls - Up & Downlight	2545 up/927 dn per bowl (delivered)	94

Non-LED Lamps

6N100: (6) 100 watt incandescent

CP-951

LED Options	Lumens	Wattage
CH188R Four Bowls - Up & Downlight	2545 up/927 dn per bowl (delivered)	188

Non-LED Lamps

12N100: (12) 100 watt incandescent

CP-952

LED Options	Lumens	Wattage
CH192R Two Bowls - Up & Downlight	5091 up/1855 dn per bowl (delivered)	192

Non-LED Lamps

8N100: (8) 100 watt incandescent

CP-953

LED Options	Lumens	Wattage
CH384R Four Bowls - Up & Downlight	5091 up/1855 dn per bowl (delivered)	384

Non-LED Lamps

16N100: (16) 100 watt incandescent

4 LED Color Temp

- 27: 2700K
- 30: 3000K
- 35: 3500K
- 40: 4000K

5 LED Dimming

- D0: 0-10v
- D1: Triac (Leading Edge)*
- D2: ELV (Trailing Edge)


6 Voltage Options

- 120: 120 volt
- 277: 277 volt (Not available with incandescent lamp options)

7 Diffuser Options

- WH: White Acrylic
- FX: Faux Alabaster Acrylic

8 Stem Options

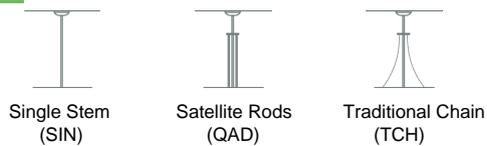

1

Fixture #

2

Finish (Finish)

2

Cast Band Desi (Finish)

3

Lamping

4

Color Temp

5

Dimming

6

Voltage

7

Diffuser

8

Stem