

Nuville Cornice Chandelier





CP-950

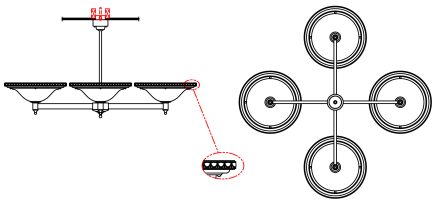

CP-951

Notes

- OAH is standard unless specified.
- FINISH: Finish is low VOC thermo-cure powdercoat paint. Specify three digit color suffix with "PT" finish options.
- HOUSING: Consists of spun aluminum or brass rings trimmed with cast aluminum or brass band, acrylic bell diffusers and choice of stem kit.
- MOUNTING:
  CP-950 & 952: Fixture specified with brushed or painted finish supplied with swivel hanger for mounting to standard octagon junction box. Fixture specified with brass material supplied with swivel hanger requiring attachment to structure using a ceiling fan rated electrical box.
  CP-951 & CP-953: Fixture supplied with a painted canopy, 60-degree swivel ball and hanger. Structural support is required for this heavy fixture. 2 x 4 blocking or 1/2" IP stud extending 1/2" below finished ceiling through center of octagonal junction box is required.
- ETL listed to UL standards for dry and damp locations
- *Surge protection recommended for use with D1 (Triac/Leading Edge) dimming systems.

1 Fixture Number

CP-950	12"H x 72.5" Dia.	34" Oah.
CP-951	12"H x 72.5" Dia.	34" Oah.
CP-952	13.5"H x 84.5" Dia.	46" Oah.
CP-953	13.5"H x 84.5" Dia.	46" Oah.

2 Finish

- Brushed Solid Aluminum (BA)
- Standard Painted Finishes (PT)
- Polished Brass (PB)
- Solid Antique Brass (SAB)
- Faux Antique Brass (FAB)

Cast Band Design

- Egg & Dart Cast Trim (EGD)
- Greek Key Cast Trim (GRK)
- Rope Cast Trim (ROP)

3 Lamping

All LED options include integral 120-277v 1-100% dimming drivers compatible with 0-10v, Triac, and ELV controls. Over-current and short-circuit protected. All LEDs are 80+ CRI, 50,000 hr. L70. Wattage listed includes driver efficiency.

CP-950

LED Options	Lumens	Wattage
CH94R Two Bowls - Up & Downlight	2545 up/927 dn per bowl (delivered)	94

Non-LED Lamps
6N100: (6) 100 watt incandescent

CP-951

LED Options	Lumens	Wattage
CH188R Four Bowls - Up & Downlight	2545 up/927 dn per bowl (delivered)	188

Non-LED Lamps
12N100: (12) 100 watt incandescent

CP-952

LED Options	Lumens	Wattage
CH192R Two Bowls - Up & Downlight	5091 up/1855 dn per bowl (delivered)	192

Non-LED Lamps
8N100: (8) 100 watt incandescent

CP-953

LED Options	Lumens	Wattage
CH384R Four Bowls - Up & Downlight	5091 up/1855 dn per bowl (delivered)	384

Non-LED Lamps
16N100: (16) 100 watt incandescent

4 LED Color Temp

- 27: 2700K
- 30: 3000K
- 35: 3500K
- 40: 4000K

5 LED Dimming

- D0: 0-10v
- D1: Triac (Leading Edge)*
- D2: ELV (Trailing Edge)

6 Voltage Options

- 120: 120 volt
- 277: 277 volt (Not available with incandescent lamp options)

7 Diffuser Options

- WH: White Acrylic
- FX: Faux Alabaster Acrylic

8 Stem Options



Single Stem (SIN)



Satellite Rods (QAD)



Traditional Chain (TCH)

1	2	2	3	4	5	6	7	8
Fixture #	Finish (Finish)	Cast Band Desi (Finish)	Lamping	Color Temp	Dimming	Voltage	Diffuser	Stem

©2018 Manning Lighting Inc. Sheboygan, WI 53083 Phone: 920-458-2184 Web: manningltg.com Email: info@manningltg.com Design modification rights reserved. Made in USA.