

1 Fixture Number

- DP-950** 9.5"H x 23.5" Dia. 35" Oah.
- DP-952** 11"H x 32" Dia. 49" Oah.
- DP-956** 13.75"H x 40.5" Dia. 63" Oah.

2 Finish

- Brushed Solid Aluminum (BA)
- Standard Painted Finishes (PT)
- Polished Brass (PB)
- Solid Antique Brass (SAB)
- Faux Antique Brass (FAB)

Cast Band Design

- Egg & Dart Cast Trim (EGD)
- Greek Key Cast Trim (GRK)
- Rope Cast Trim (ROP)

3 Lamping

LED options includes integral 120-277v 1-100% dimming driver compatible with 0-10v, Triac, and ELV controls. Over-current and short-circuit protected. All LEDs are 80+ CRI, 50,000 hr. L70. Wattage listed includes driver efficiency.

DP-950

LED Options	Lumens	Wattage
B47R Uplight + Downlight	2545 up/927 down (delivered)	47

Non-LED Lamps

3N100: (3) 100 watt incandescent

DP-952

LED Options	Lumens	Wattage
B95R Uplight + Downlight	5090 up/1855 down (delivered)	95

Non-LED Lamps

4N100: (4) 100 watt incandescent

DP-956

LED Options	Lumens	Wattage
B145R Uplight + Downlight	8309 up/2782 down (delivered)	145

Non-LED Lamps

6N100: (6) 100 watt incandescent

4 LED Color Temp

- 27: 2700K
- 30: 3000K
- 35: 3500K
- 40: 4000K

5 LED Dimming

- D0: 0-10v
- D1: Triac (Leading Edge)*
- D2: ELV (Trailing Edge)


6 Voltage Options

- 120: 120 volt
- 277: 277 volt (Not available with incandescent lamp options)

7 Diffuser Options

- WH: White Acrylic
- FX: Faux Alabaster Acrylic

8 Stem Options

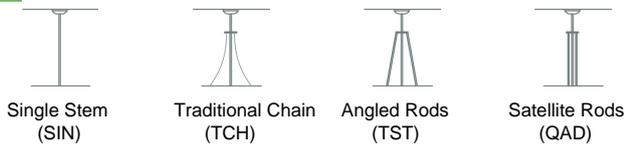

1

Fixture #

2

Finish
(Finish)

2

Cast Band Desi
(Finish)

3

Lamping

4

Color Temp

5

Dimming

6

Voltage

7

Diffuser

8

Stem