

🕀 Manning Lighting







Notes

- OAH is standard unless specified.
- FINISH: Finish is low VOC thermo-cure powdercoat paint or clear lacquer. Specify three digit color suffix with "PT" finish options.
- HOUSING: Consists of a spun aluminum or brass trim ring with an acrylic bell diffuser and choice of stem kit.
- MOUNTING: Fixture supplied with a painted canopy, 45-degree swivel ball and hanger for mounting to standard octagon junction box.

Finish


Lamping

- ETL listed to UL standards for dry and damp locations

Fixture #

 *Surge protection recommended for use with D1 (Triac/Leading Edge) dimming systems.

Nuville Pendant

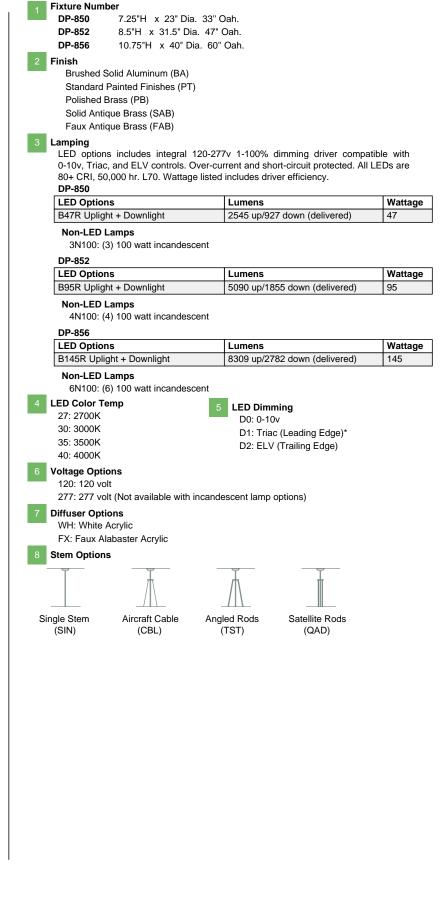

(Finish)				
©2018 Manning Lighting Inc. Sheboygan, WI 53083	Phone: 920-458-2184	Web: manningltg.com	Email: info@manningltg.com	Design modification rights reserved. Made in USA.

Dimming

Voltage

Diffuser

Stem

Color Temp