

Notes

- OAH is standard unless specified.
- FINISH: Finish is low VOC thermo-cure powdercoat paint or clear lacquer. Specify three digit color suffix with "PT" finish options.
- HOUSING: Consists of spun aluminum top and bottom rings and thermoformed opal white acrylic shallow bowl diffuser.
- MOUNTING: Fixture mounts to a standard octagonal junction box.
- ETL listed to UL standards for dry and damp locations
- *Surge protection recommended for use with D1 (Triac/Leading Edge) dimming systems.

1 Fixture Number

- DP-881** 7"H x 24" Dia. 33" Oah.
- DP-883** 7.5"H x 30" Dia. 34" Oah.
- DP-885** 8.75"H x 36" Dia. 35" Oah.

2 Finish

- Standard Painted Finishes (PT)
- Brushed Solid Aluminum (BA)

3 Lamping

LED options includes integral 120-277v 1-100% dimming driver compatible with 0-10v, Triac, and ELV controls. Over-current and short-circuit protected. All LEDs are 80+ CRI, 50,000 hr. L70. Wattage listed includes driver efficiency.

DP-881

| LED Options | Lumens | Wattage |
|--------------------------------|-------------------------------|---------|
| B48 Downlight + Uplight (48w) | 1402 up/1533 down (delivered) | 48 |
| B48R Uplight + Downlight (48w) | 2804 up/766 down (delivered) | 48 |

DP-883

| LED Options | Lumens | Wattage |
|--------------------------------|-------------------------------|---------|
| B96 Downlight + Uplight (96w) | 2804 up/3066 down (delivered) | 96 |
| B96R Uplight + Downlight (96w) | 5608 up/1533 down (delivered) | 96 |

DP-885

| LED Options | Lumens | Wattage |
|----------------------------------|-------------------------------|---------|
| B128 Downlight + Uplight (128w) | 2804 up/4599 down (delivered) | 128 |
| B128R Uplight + Downlight (128w) | 8412 up/1533 down (delivered) | 128 |

4 LED Color Temp

- 27: 2700K
- 30: 3000K
- 35: 3500K
- 40: 4000K

5 LED Dimming

- D0: 0-10v
- D1: Triac (Leading Edge)*
- D2: ELV (Trailing Edge)


6 Voltage Options

- 120: 120 volt
- 277: 277 volt (Not available with incandescent lamp options)

7 Diffuser Options

- WH: Opal White Acrylic

8 Stem Options

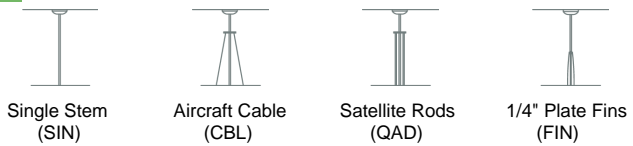

| 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 |
|-----------|-----------------|---------|------------|---------|---------|----------|------|
| Fixture # | Finish (Finish) | Lamping | Color Temp | Dimming | Voltage | Diffuser | Stem |