

Ohreo Pendant (bowl)



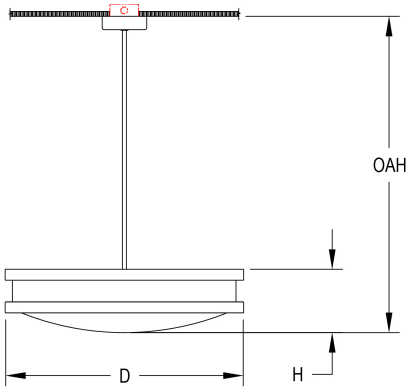



Notes

- OAH is standard unless specified.
- FINISH: Finish is low VOC thermo-cure powdercoat paint or clear lacquer. Specify three digit color suffix with "PT" finish options.
- HOUSING: Consists of spun aluminum top and bottom rings and thermoformed opal white acrylic shallow bowl diffuser.
- MOUNTING: Fixture mounts to a standard octagonal junction box.
- ETL listed to UL standards for dry and damp locations
- *Surge protection recommended for use with D1 (Triac/Leading Edge) dimming systems.

1 Fixture Number

DP-881	7"H x 24" Dia. 33" Oah.
DP-883	7.5"H x 30" Dia. 34" Oah.
DP-885	8.75"H x 36" Dia. 35" Oah.

2 Finish

Standard Painted Finishes (PT)
Brushed Solid Aluminum (BA)

3 Lamping

LED options includes integral 120-277v 1-100% dimming driver compatible with 0-10v, Triac, and ELV controls. Over-current and short-circuit protected. All LEDs are 80+ CRI, 50,000 hr. L70. Wattage listed includes driver efficiency.

DP-881

LED Options	Lumens	Wattage
B48 Downlight + Uplight (48w)	1402 up/1533 down (delivered)	48
B48R Uplight + Downlight (48w)	2804 up/766 down (delivered)	48

DP-883

LED Options	Lumens	Wattage
B96 Downlight + Uplight (96w)	2804 up/3066 down (delivered)	96
B96R Uplight + Downlight (96w)	5608 up/1533 down (delivered)	96

DP-885

LED Options	Lumens	Wattage
B128 Downlight + Uplight (128w)	2804 up/4599 down (delivered)	128
B128R Uplight + Downlight (128w)	8412 up/1533 down (delivered)	128

4 LED Color Temp

27: 2700K
30: 3000K
35: 3500K
40: 4000K

5 LED Dimming

D0: 0-10v
D1: Triac (Leading Edge)*
D2: ELV (Trailing Edge)

6 Voltage Options

120: 120 volt
277: 277 volt (Not available with incandescent lamp options)

7 Diffuser Options

WH: White Acrylic

8 Stem Options


Single Stem (SIN)


Aircraft Cable (CBL)


Satellite Rods (QAD)


1/4" Plate Fins (FIN)

1	2	3	4	5	6	7	8
Fixture #	Finish (Finish)	Lamping	Color Temp	Dimming	Voltage	Diffuser	Stem

©2018 Manning Lighting Inc. Sheboygan, WI 53083 Phone: 920-458-2184 Web: manningltg.com Email: info@manningltg.com Design modification rights reserved. Made in USA.